


NO.	ITEM		SPECIFITION			NOTE
1	IMAGE FORMAT		1/1.7"			
2	IMAGE CIRCLE		ø9.80			Max
3	OPTICAL EFL		10-50			IN AIR
4	APERTURE		1.4			W-T
5	RESOLUTION		8MP			
6	SYSTEM TTL		109.50±0.3mm			
7	FIELD OF VIEW (°)	16:9	W-T	D	H	V
		1/1.7"		48.6-11.7	41.8-10.0	23.3-5.7
		1/1.8"		44.8-10.8	38.6-9.4	21.4-5.3
8	CHIEF RAY ANGLE		6.98°(W)~4.64°(T)			
9	ILLUMINATION		50.0%(W)~40.2%(T)			
10	DISTORTION		-9.95%(W)~-1.29%(T)			
11	OPTICAL BFL		/			
12	MECHANICAL BFL		7.25			
13	DIMENSION		ø50.00x92.00mm			
14	MOUNT		C			
15	IR CORRETION		YES			
16	ELEMENT		/			
17	WAVELENGTH		430-650&850			
18	M.O.D		0.5M(W)~1.5M(T)			
19	TEMPERATURE		-20℃~+70℃			
20	ZOOM OPERTION		MANUAL			
21	IRIS OPERATION		P-IRIS			
22	FOCUS OPERATION		MANUAL			

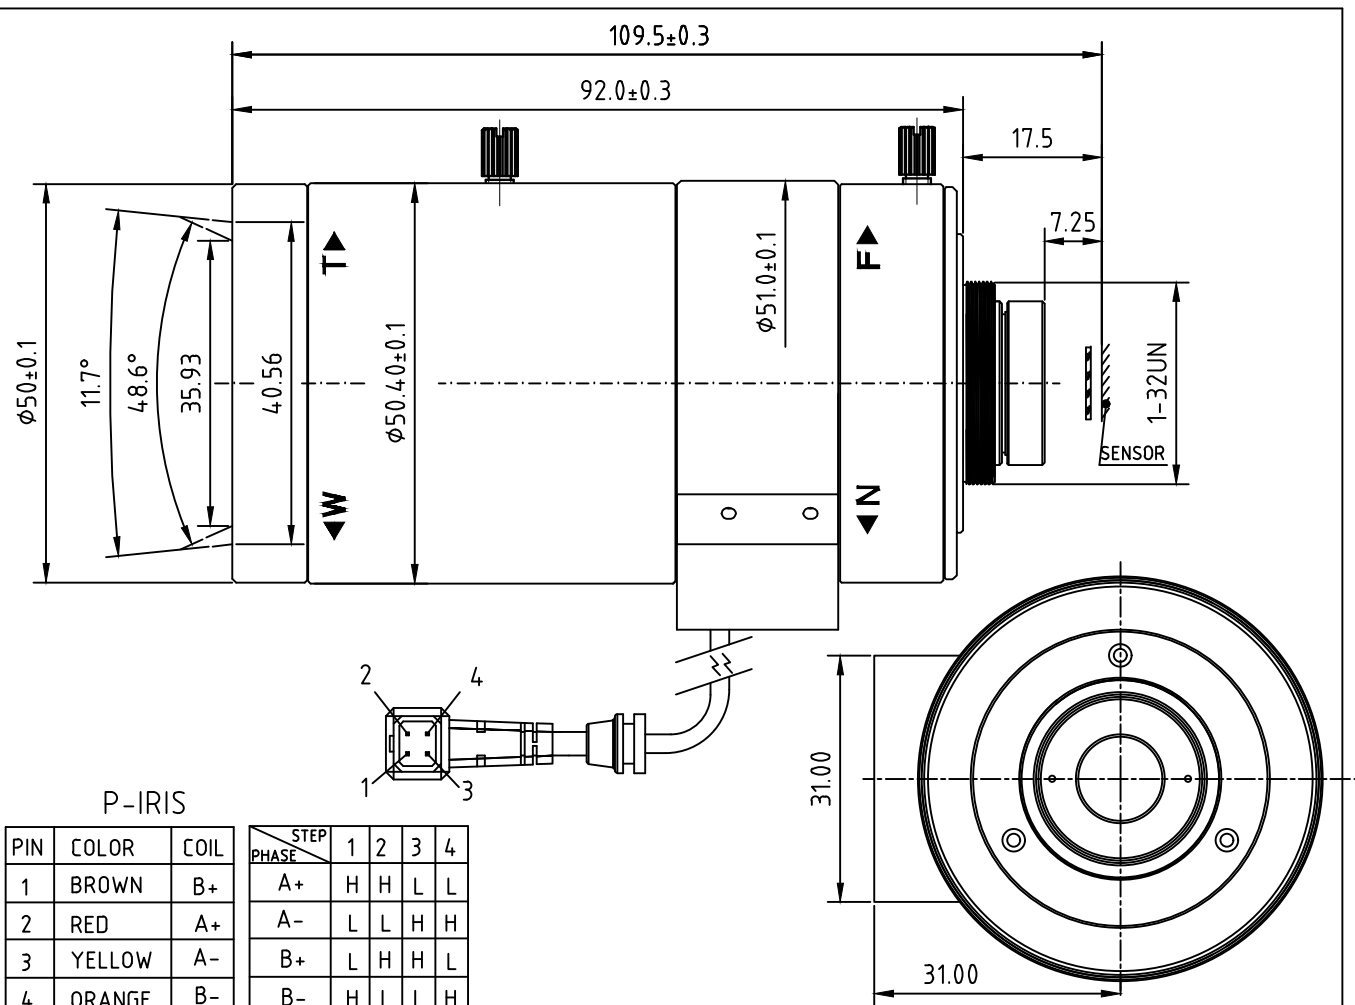

PIN	COLOR	COIL	STEP				
			PHASE	1	2	3	4
1	BROWN	B+	A+	H	H	L	L
2	RED	A+	A-	L	L	H	H
3	YELLOW	A-	B+	L	H	H	L
4	ORANGE	B-	B-	H	L	L	H

TOLERANCE	ANGLE	LENGTH&DIAMETER(mm)	REMARK	DESCRIPTION		TYPE		UNTIS	mm
0 ~ 50°	±2.0°					NAME	BCB1050CP-8MP	SCALE	1:1
50 ~ 200°	±5.0°					MODEL		REV.	A
						STAGE		WEIGHT	
						福州创恒光电有限公司 CRYLIGHT PHOTONICS INC.			