

R3000 Series


R3016PMG-16H-RGF01E



Features

- Built-in Red light, integrated design;
- Support multiple trigger modes such as software trigger/external trigger/free run;
- 100M Ethernet interface, IP65 protection level;
- Abundant IO interfaces such as Ethernet, RS232, GPIO, support multiple communication protocols;
- Support various code formats and evaluations of code quality;
- Built-in AI code reading algorithms and multi-parameters polling to ensure effects of complex applications.

Dimensions (mm)

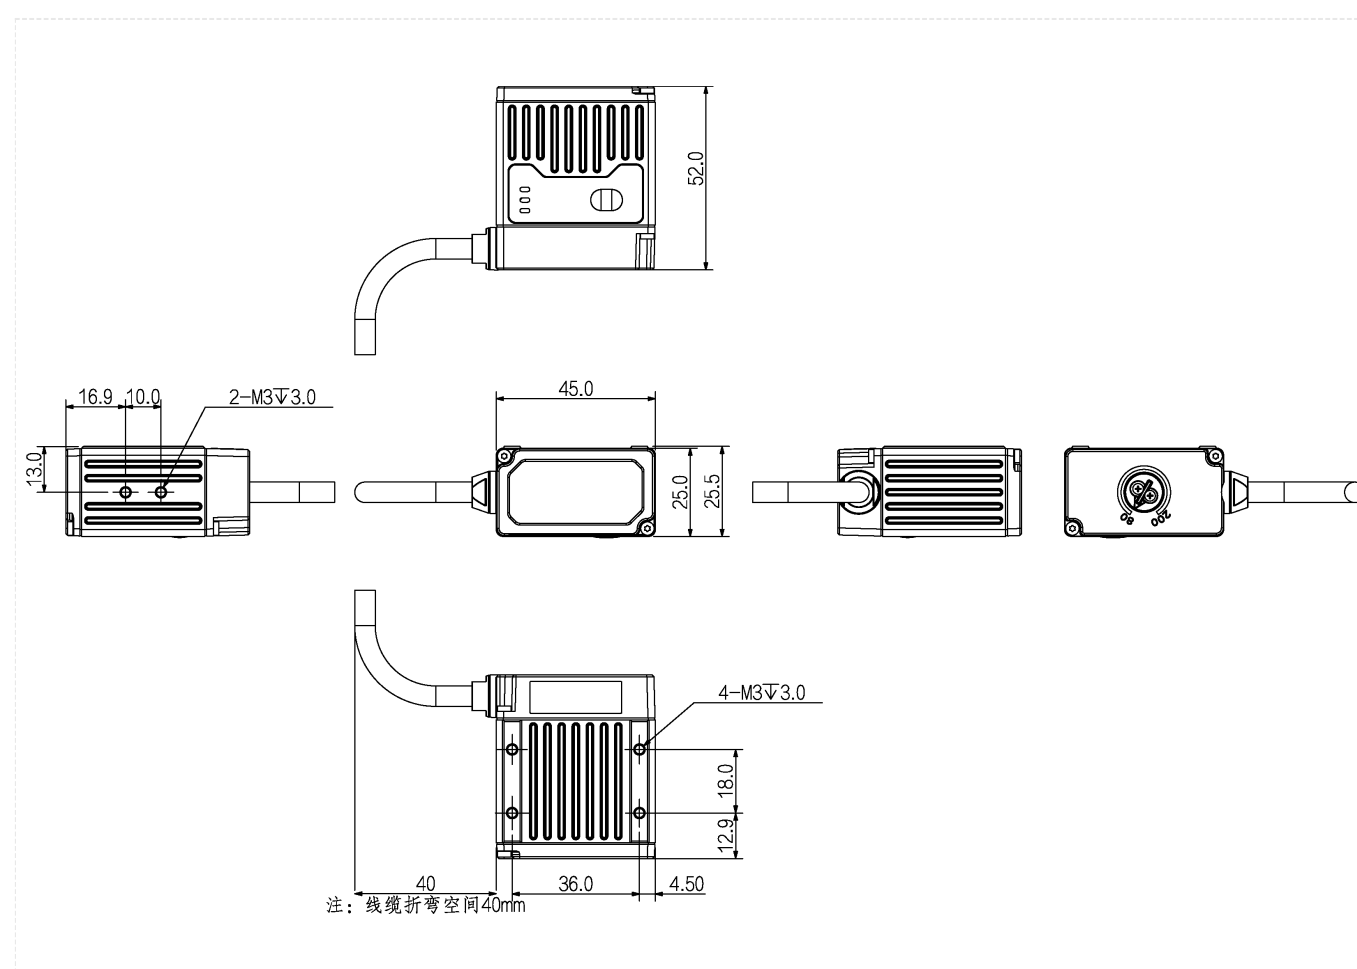

Specification

	Model	R3016PMG-16H-RGF01E
Basic	Resolution	1440 × 1080
	Max. Frame rate	60 fps
	Shutter Mode	Global
	Mono/Color	Mono
	Trigger Mode	Support multiple trigger modes such as software trigger/external trigger/free run;
	Software	EasyID
	Certifications	CE , UKCA , KC
	Function	1D: Code 39/Code 93/Code128/CodaBar/EAN8/EAN13/UPCA/UPCE/ITF25/2of5 (Industrial2of5) etc. and 2D:QR/Data Matrix/MQR/GS1 DM/GS1QR/PDF417/QRModel1/DMECC000-140 etc.; Quality Evaluation: ISO/IEC 29158(AIM-DPM), ISO/IEC 15415, ISO/IEC 15416)
	Focal Length	16 mm
	Focus Control	Manual control
	Light Source Type	Red
Performance	Working Distance	80 - 200 mm
	Field of View (FOV)	21 × 16 mm - 58 × 44 mm
	Max. Read Speed	50 codes/s
	Max. Operating Speed	3 m/s
	Min. Resolution	1D code 0.015mm/ 2D code 0.027mm
	Sight	Orange/Green light indication
Port	Connector	Industrial-grade M12 connectors are Ethernet and GPIO interfaces
	Network Port	100M Ethernet
	GPIO Interface	1x RS232 interface, 1x Opto-isolated input, 1x Opto-isolated output, 1 configurable input and output
	Communication Mode	RS232, Ethernet
	Communication protocol	SDK , TCP Client , TCP Server , FTP , RS232 , Profinet、 Modbus、 EtherNet/IP、 MC (SLMP) 、 FINS/UDP 、 FINS/TCP
	LED Indicator	Power indicator, Network indicator, Result indicator
Power	Power Supply	Support 9~26VDC, 1A input, suitable for industrial environment
	Power Consumption	<9.5W
Structure	Product Dimensions	45.0mm × 52.0mm × 25.5mm(Without cable)
	Net Weight	<140 g
	Protection	IP65
	Casing Material	Aluminum alloy + Front cover
	Operating Temperature	-20℃ ~ +50℃

Environment	Operating Humidity	20% ~ 95%, Non condensing
	Storage Temperature	-30°C ~ +70°C