

What's in the box?

In addition to this guide, the package includes the following items:



iWSN-101 with Audio cable



Magnetic plate

Technical Support


service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICPDAS website.


- For Mobile Web

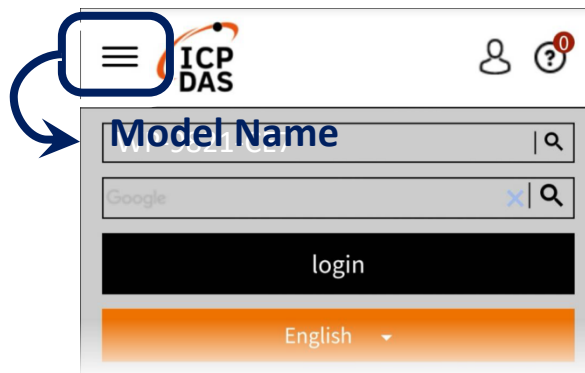

- For Desktop Web



1 Appearance

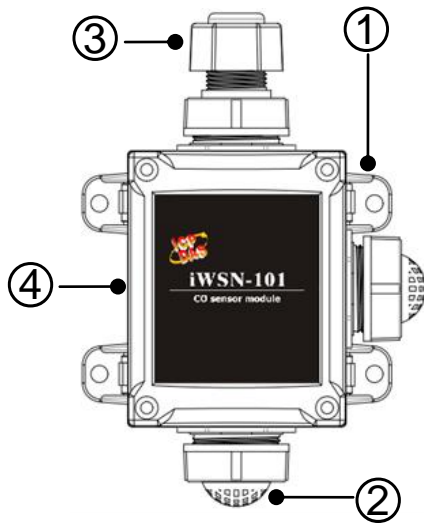

| Number | Instructions |
|--------|----------------|
| 1 | Wall mount |
| 2 | CO Sensor |
| 3 | Extension port |
| 4 | Magnetic mount |

2 Modbus Address Mapping Table

| iWSN sensor Node ID | The range of address mapping (Hexadecimal) | The range of address mapping (Decimal · Base 0) | The range of address mapping (Decimal · Base 1) |
|---------------------|--|---|---|
| 1 | 0x0141~0x016C | 321~364 | 40322~40365 30322~30365 |
| 2 | 0x0241~0x026C | 577~620 | 40578~40621 30578~30621 |
| ... | ... | ... | ... |
| 30 | 0x1E41~0x1E6C | 7745~7788 | 47746~47789 37746~37789 |
| 31 | 0x1F41~0x1F6C | 8001~8044 | 48002~48045 38002~38045 |

For example, iWSN-1510X/1511X node ID 1:

| PLC address (Base1) | Protocol address (Base0) | Function code | Property | Data type | Description | Remarks |
|---------------------|--------------------------|---------------|----------|-----------|-------------|--------------------------------------|
| 40346 30346 | 345 (0x0159) | 03, 04 | R | Uint16 | CO | Measurement range is : 0 to 1000 ppm |