

IES3020G Series

DIN-Rail Mounting

16/20-port Full Gigabit Layer 2 Unmanaged Industrial Ethernet Switch

- Support 4 Gigabit fiber ports (SFP slots) optional, 16 Gigabit copper ports
- Support dual power supply input, input voltage: 12~48VDC
- Support -40~75°C wide operating temperature range




Introduction

IES3020G series are 16/20-port full Gigabit layer 2 unmanaged industrial Ethernet switches. This series provide Gigabit copper port and Gigabit SFP slot. They adopt DIN-Rail mounting to meet the requirements of different application scenes.

Power supply input is two independent power supply circuits, which can ensure the device normal operation when one of the power supplies breaks down. Design of DIP switch can achieve the device rebooting. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, intelligent manufacturing and other industrial fields.

Dimension

Unit:mm

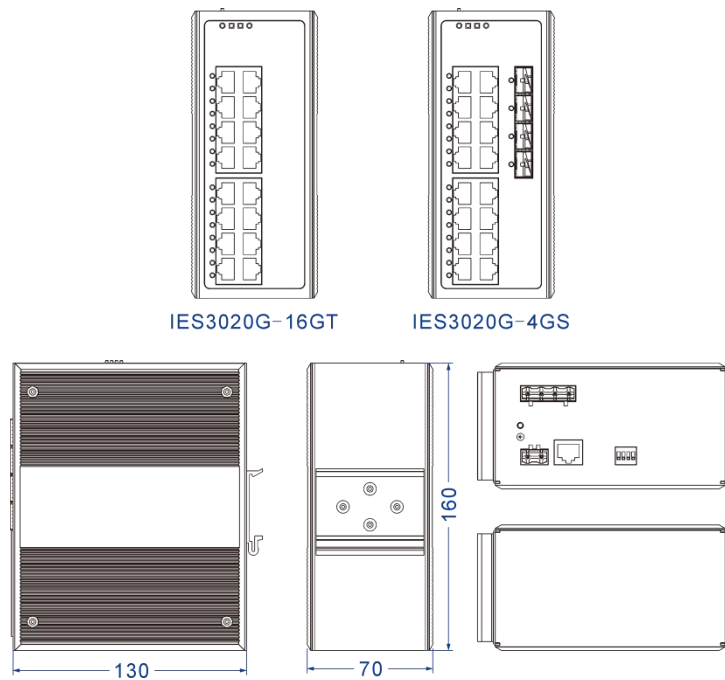

Specification

Standard & Protocol

IEEE 802.3 for 10Base-T
IEEE 802.3u for 100Base-TX

	IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X									
Interface	Copper port: 10/100/1000Base-T(X), RJ45, Automatic Flow Control, Full/half Duplex Mode, MDI/MDI-X Autotuning SFP slot: 1000Base-SFP									
LED Indicator	Running Indicator, Port Indicator, Power Supply Indicator									
Switch Property	Transmission mode: store and forward MAC address: 16K Packet buffer size: 12Mbit Backplane bandwidth: 56G Switch time delay: <10μs									
Power Requirement	12~48VDC, 4-pin 7.62mm pitch terminal blocks dual power supply redundancy, reverse polarity protection, nonpolarity									
Power Consumption	<table border="1"> <thead> <tr> <th>Model</th> <th>No-load (@48VDC)</th> <th>Full-load (@48VDC)</th> </tr> </thead> <tbody> <tr> <td>IES3020G-4GS</td> <td>11.04W</td> <td>14.88W</td> </tr> <tr> <td>IES3020G-16GT</td> <td>11.04W</td> <td>13.68W</td> </tr> </tbody> </table>	Model	No-load (@48VDC)	Full-load (@48VDC)	IES3020G-4GS	11.04W	14.88W	IES3020G-16GT	11.04W	13.68W
Model	No-load (@48VDC)	Full-load (@48VDC)								
IES3020G-4GS	11.04W	14.88W								
IES3020G-16GT	11.04W	13.68W								
Environmental Limit	Operating temperature range: -40~75°C Storage temperature range: -40~85°C Relative humidity: 5% ~ 95% (no condensation)									
Physical Characteristic	Housing: IP40 protection, metal Installation: DIN-Rail mounting Dimension (W x H x D): 70mm×160mm×130mm Weight: ≤1.08kg									
Industrial Standard	IEC 61000-4-2 (ESD) , Level 3 IEC 61000-4-4 (EFT), Level 3 IEC 61000-4-5 (Surge), Level 3 Shock: IEC 60068-2-27 Free fall: IEC 60068-2-32 Vibration: IEC 60068-2-6									
Certification	CE, FCC, RoHS									
Warranty	5 years									

Ordering Information

Available Models	Gigabit SFP Slot	Gigabit Copper Port	Power Supply Range
IES3020G-4GS-N	4	16	12~48VDC
IES3020G-16GT-N	-	16	dual power supply