



## IES6000-8GP2HS-2P48-240W

DIN-Rail or Wall Mounting

10-Port Gigabit Layer 2 Managed Industrial PoE Ethernet Switch

- Support 2 2.5G SFP slots and 8 Gigabit PoE copper ports
- Adopt patented Ring technology, support single ring, coupling ring, chain, Dual-homing, automatic recovery time of network failure < 20ms
- Support multiple network protocols and industrial standard, such as STP/RSTP/MSTP, ERPS, DHCP, VLAN, QoS function, IGMP Snooping function, LLDP etc.
- Support dual power redundancy, input voltage is 48VDC
- Support -40~75°C wide operating temperature range





# Introduction

---

IES6000-8GP2HS-2P48-240W is 10-port Gigabit layer 2 managed industrial PoE Ethernet switch. PoE power supply conforms to IEEE 802.3af/at protocol standard. This product provides Gigabit PoE copper ports and 2.5G SFP slots, and it adopts DIN-Rail or Wall mounting which can meet the requirements of different scenes.

Network management system supports various network protocols and industrial standards, such as Ring, STP/ RSTP/MSTP, ERPS, DHCP, VLAN, QoS function, IGMP Snooping, LLDP, Port Trunking, Port Mirroring, etc. It also possesses complete management functions, including Port Configuration, Access Control, Network Diagnosis, Online Upgrading and so on, and supports CLI, WEB, Telnet, SSH, SNMP and other access methods. Network management system could bring you great user experience through its friendly interface design and easy and convenient operation.

The product provides two independent power supply circuits, which can ensure the normal operation of the device when one power supply fails. The design of DIP switch could implement device factory setting recovery. When DC power supply or port has link failure, ALM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. The hardware adopts fanless, low power consumption and wide temperature design, which has passed rigorous industrial standard tests, and suits for the industrial scene environment with harsh requirements for EMC. It can be widely used in AP coverage, railway transportation, smart city, safe city, new energy, smart grid, intelligent manufacturing and other industrial fields.

## Features and Benefits

---


- ⊙ SNMPv1/v2c/v3 is used for network management of various levels
- ⊙ RMON can be used for efficient and flexible network monitoring
- ⊙ QoS supports real-time traffic classification and priority setting
- ⊙ LLDP can achieve automatic topology discovery, which is convenient for visual management
- ⊙ DHCP server can be used for distributing IP address with different strategies
- ⊙ DHCP Snooping can ensure DHCP client gets IP address from legal DHCP server
- ⊙ DHCP relay function can realize IP address, gateway, DNS configuration cross network segment
- ⊙ File management is convenient for the device rapid configuration and online upgrading
- ⊙ User privilege classification configuration can set user privilege level
- ⊙ SSH configuration and HTTPS configuration can improve device's management security and guarantee data access security
- ⊙ Support NAS network access service and provide security assurance for multiple services
- ⊙ MEP function can determine the scope and boundary of maintenance domain
- ⊙ Ring and STP/RSTP/MSTP can achieve network redundancy, preventing network

storm

- ⊙ EPRS function can realize link backup and improve the reliability of network
- ⊙ Loop protection could efficiently eliminate the influence caused by port loopback
- ⊙ Relay alarm is convenient for troubleshooting of construction site
- ⊙ Storm suppression can restrain broadcast, unknown multicast and unicast
- ⊙ VLAN is used for simplifying network planning
- ⊙ PoE could power device over Ethernet, thus decreasing the cable connection of powered devices
- ⊙ Support DDM (digital diagnostic monitoring) function, which can monitor the optical power, temperature, voltage and other real-time parameters of SFP fiber module with DDM function, facilitating the link default diagnosis of optical fiber
- ⊙ Static Aggregation and LACP can increase network bandwidth and enhance the reliability of network connection to achieve the best bandwidth utilization
- ⊙ IGMP Snooping can be used for filtering multicast traffic to save the network bandwidth
- ⊙ Network diagnosis and troubleshooting could be conducted via Ping, Ping6, cable detection and port mirroring

## Dimension

Unit: mm

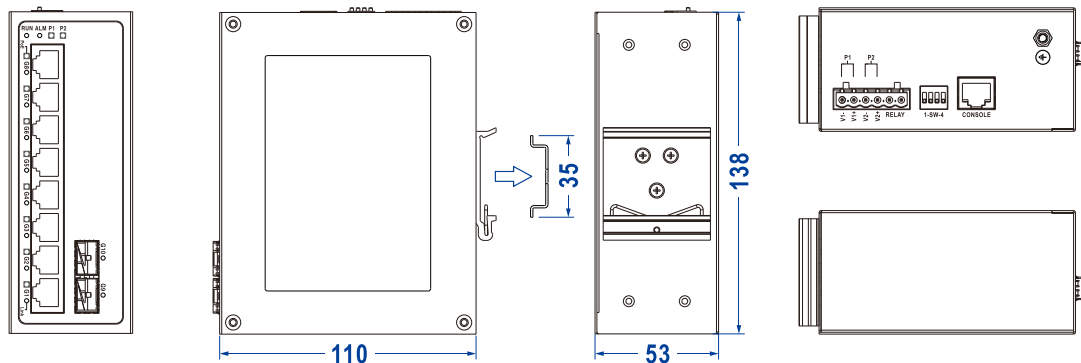

## Specification

### Standard & Protocol

IEEE 802.3 for 10Base-T  
IEEE 802.3u for 100Base-TX  
IEEE 802.3ab for 1000Base-T  
IEEE 802.3z for 1000Base-X  
IEEE 802.3x for Flow Control  
IEEE 802.1D for Spanning Tree Protocol  
IEEE 802.1w for Rapid Spanning Tree Protocol  
IEEE 802.1s for Multiple Spanning Tree Protocol  
ITU-T G.8032 for ERPS  
IEEE 802.1Q for VLAN

	<p>IEEE 802.1p for CoS          IEEE 802.1AB for LLDP          IEEE 802.3ad for LACP          IEEE 802.3af for PoE          IEEE 802.3at for PoE+</p>
<b>Management</b>	<p>SNMP v1/v2c/v3 Centralized Management of Equipment, QoS, LLDP, LLDP-MED, DHCP Server, DHCP relay, user password, login method, File Management, Log Management, Port Statistics, MEP and PoE</p>
<b>Security</b>	<p>User Privilege Classification, SSH Configuration, HTTPS Configuration, Access Control, DHCP Snooping, RMON, NAS, Radius Server Authentication, TACACS + Server Authentication, Ethernet Services, Port Alarm, DC Power Supply Alarm, Loop Protection, Temperature Protection</p>
<b>Switch Function</b>	<p>802.1Q VLAN, Static Aggregation, LACP</p>
<b>Unicast / Multicast</b>	<p>IGMP Snooping, Unicast MAC</p>
<b>Redundancy Technology</b>	<p>Ring, STP/RSTP/MSTP, ERPS</p>
<b>Troubleshooting</b>	<p>Ping, Ping6, Cable Detection, Port Mirroring, DDMI</p>
<b>Time Management</b>	<p>NTP, Time Zone Configuration</p>
<b>Interface</b>	<p>Gigabit PoE copper port: 10/100/1000Base-T(X), RJ45, Automatic Flow Control, Full/Half Duplex Mode, MDI/ MDI-X Autotuning; The single port supports 15.4W PoE output power of IEEE802.3af standard and 30W PoE+ output power of IEEE802.3at standard; PoE power supply pin: V+, V+, V-, V- correspond to pin 1, 2, 3, 6</p> <p>2.5G SFP Slot: 100/1000 Base-X self-adaption or 100/1000/2.5G Base-X forced mode, SFP slot</p> <p>Console port: CLI command line management port(RS-232), RJ45</p> <p>Alarm Port: 6-Pin 5.08mm pitch terminal blocks, relay occupies 2 pins and 1 relay alarm information output is supported, the current load capability is 1A@30VDC or 0.3A@125VAC</p>
<b>Indicator</b>	<p>Running Indicator, Alarm Indicator, Power Supply Indicator, Interface Indicator, PoE Indicator</p>
<b>Switch Property</b>	<p>Transmission mode: store and forward          MAC address: 8K</p>

	<p>Buffer: 4Mbit</p> <p>Backplane bandwidth: 30G</p> <p>Switch time delay: &lt;10μs</p>
<b>Power Supply</b>	<p>Power input: 48VDC</p> <p>Connection method: 6- Pin 5.08mm pitch terminal blocks (includes 4-pin power supply)</p> <p>Power supply quantity: dual power supply redundancy backup</p> <p>Connection protection: anti-reverse connection</p> <p>Overcurrent protection: 5A</p>
<b>Power Consumption</b>	<p>Full-load: &lt;240W</p>
<b>Working Environment</b>	<p>Operating temperature: -40~75°C</p> <p>Storage temperature:-40~85°C</p> <p>Relative humidity: 5%~95% (no condensation)</p>
<b>Physical Characteristic</b>	<p>Housing: IP40 protection, metal</p> <p>Installation: DIN-Rail or wall mounting</p> <p>Dimension (W x H x D): 53mm×138mm×110mm</p>
<b>Industrial Standard</b>	<p>IEC 61000-4-2 (ESD, electrostatic discharge), Level 3</p> <p>IEC 61000-4-4 (EFT, electrical fast transient pulses), Level 3</p> <p>IEC 61000-4-5 (Surge), Level 3</p> <p>Shock: IEC 60068-2-27</p> <p>Free fall: IEC 60068-2-32</p> <p>Vibration: IEC 60068-2-6</p>
<b>Authentication</b>	<p>CE, FCC, RoHS</p>
<b>Warranty</b>	<p>5 years</p>

# Ordering Information

Available Models	Gigabit PoE Copper Port	2.5G SFP Slot	Power Supply
IES6000-8GP2HS-2P48-240W-N	8	2	48VDC redundant power supply