


Bar Light

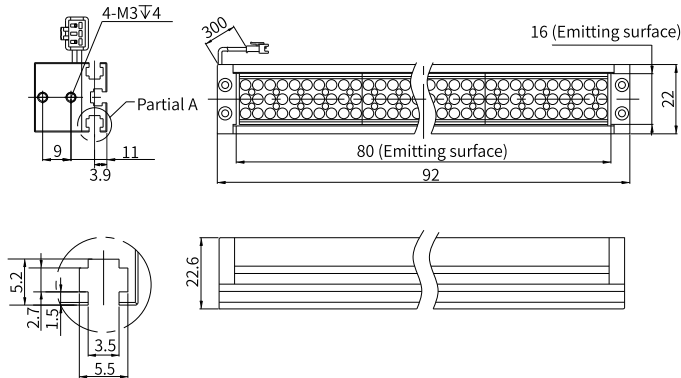


Partial A
M3 nut slot, for mounting


Technical specification

Model	HDL3-80X16W
Lighting method	Continuous / Strobe lighting
Color	W: 5800-7300K
LED rows	3
Emitting surface (mm)	80×16
Input voltage (V)	24
Output power (W)	W: 3.4
L×W×H (mm)	92×22×22.6
Weight (g)	80
Operation	Temperature: 0-40°C, humidity: 20-85%, non-condensation
Storage	Temperature: 0-40°C, humidity: 20-85%, non-condensation
Accessories	Extension cable: 1m/2m/3m/5m/7m
Development	Custom light to get best effects

Relative illuminance graph

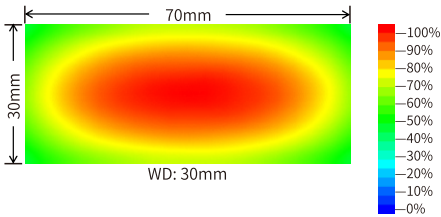

Spectrum chart

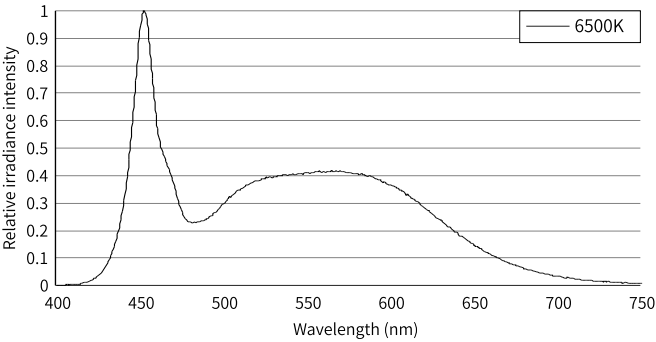

Illuminance curve

