


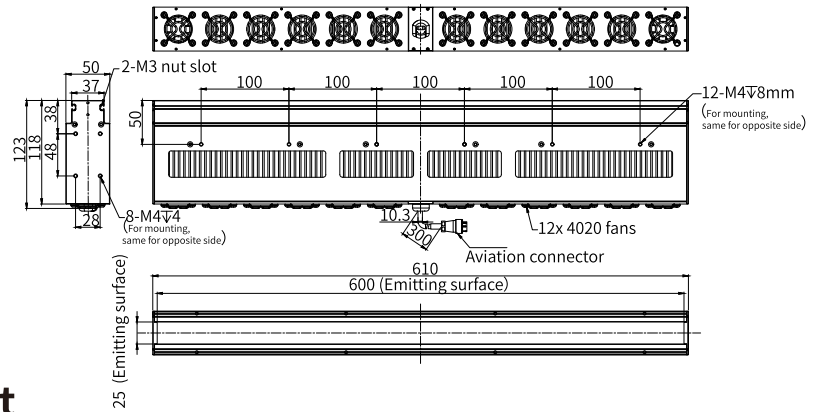


Super-high Brightness Line Light


Technical specification

Model	LNHS-600W-FN
Lighting method	Continuous / Strobe lighting
Color	W: 6000-7000K
Recommended WD (mm)	50-100
Input voltage (V)	48
Output power (W)	W: 576
L×W×H (mm)	610×50×123
Weight (kg)	4.43
Operation	Temperature: 0-40°C, humidity: 20-85%, non-condensation
Storage	Temperature: 0-40°C, humidity: 20-85%, non-condensation
Accessories	Diffusers
Development	Custom light to get best effects


Relative illuminance graph

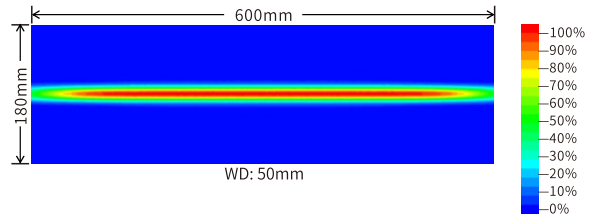


Transverse light intensity curve

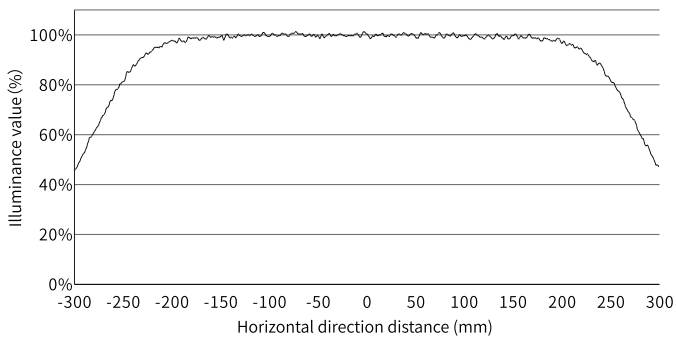


Longitudinal light intensity curve


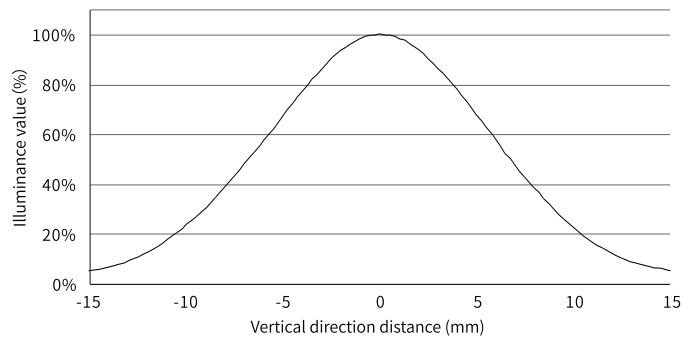


Spectrum chart

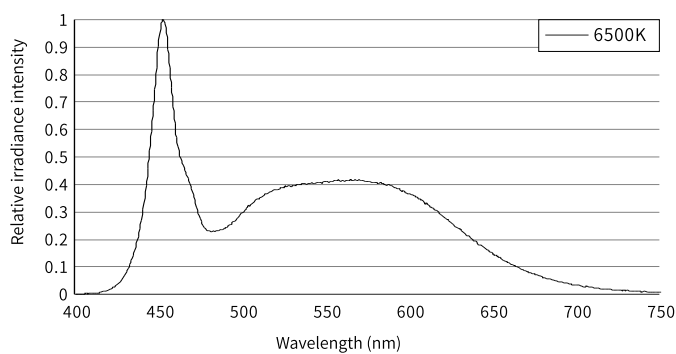

Illuminance curve

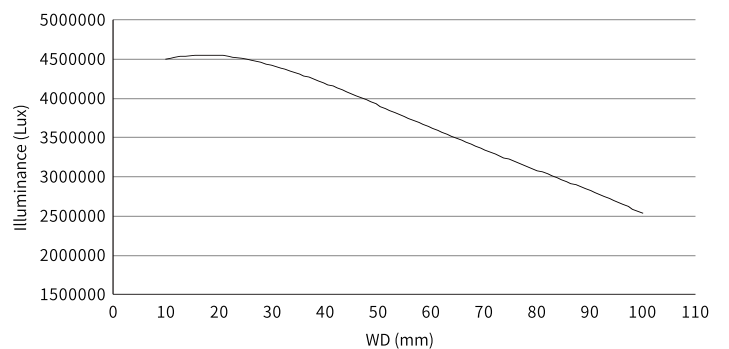

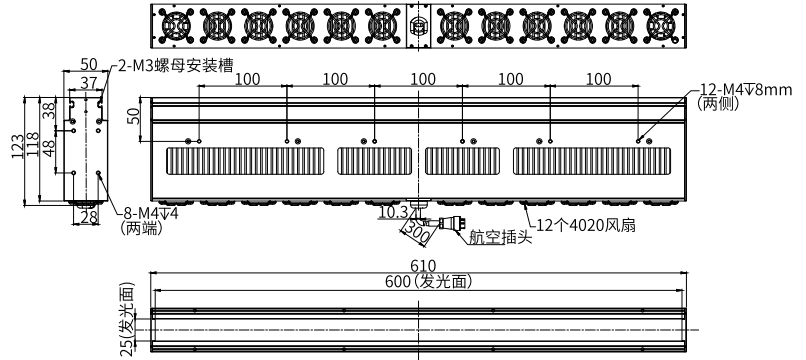


超高亮线形光源


技术指标

型号	LNHS-600W-FN
发光模式	常亮/频闪
发光颜色	W:6000-7000K
推荐工作距离(mm)	50-100
输入电压(V)	48
输出功率(W)	W:576
长度×宽度×高度(mm)	610×50×123
重量(kg)	4.43
工作环境	温度:0~40℃,湿度:20-85%非凝结
储存条件	温度:0~40℃,湿度:20-85%非凝结
选配件	漫射板
光源设计开发	针对用户个性需求提供设计、开发服务,达到最佳图像效果


相对辐射照度图

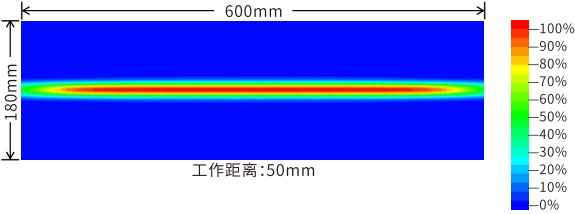


横向光强分布曲线

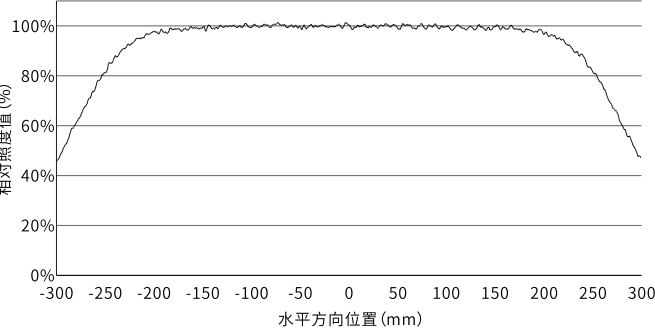

纵向光强分布曲线

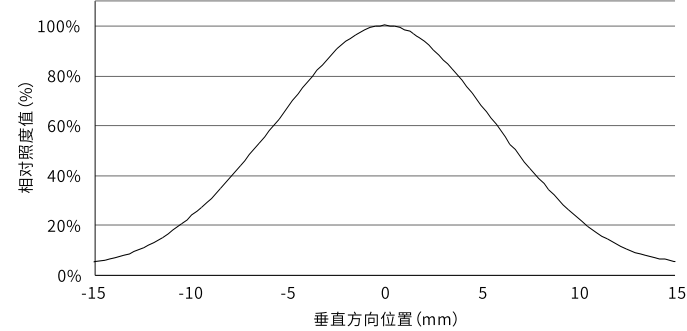

光谱图

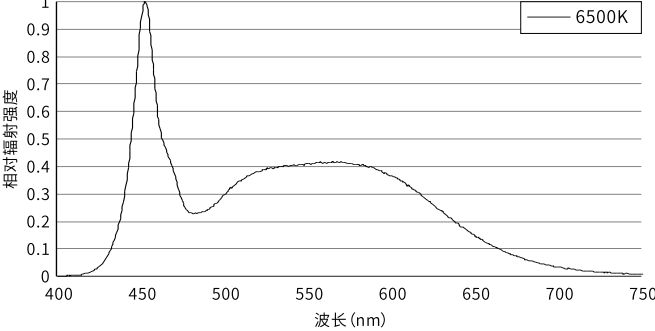

照度曲线图

