


# EPIC-EH120\_I726L VER:1.0 Spec



EPIC-EH120\_I726L VER:1.0



EPIC-EH120\_I726L VER:1.0

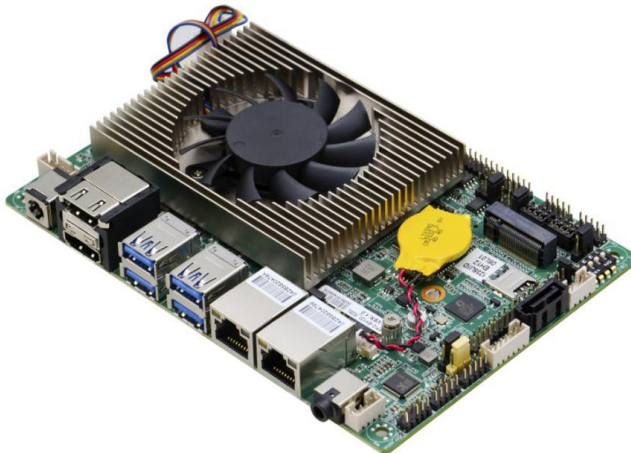

EPIC-EH120\_I726L VER:1.0

<b>Model No.</b>	EPIC-EH120_I726L VER:1.0(1255U)
<b>Processor</b>	Onboard Intel®Alder Lake 12th Core I7-1255U 10 core 12-thread CPU, TDP 15W
<b>Chipset</b>	Compatible with Intel®Alder Lake-U/Raptor Lake-U 12th/13th Celeron/I3/I5/I7 CPU
<b>Model No.</b>	SOC
<b>Model No.</b>	1* DDR4 SODIMM RAM slot, 3200MHz, up to 32GB
<b>Processor</b>	Integrated Intel® Iris® Xe Graphics, support DirectX12.1,OpenGL4.6,4K display 2*HDMI1.4, 1* LVDS Note: LVDS / EDP selectable via jumper
<b>LAN</b>	2* I210AT Gigabit Ethernet, support Wake on LAN、PXE
<b>Storage</b>	1* 7pin SATA3.0 port, transfer speed up to 6Gbps 1* M.2 slot, support M.2 2280 NVME PCIE X4 SSD
<b>Audio</b>	Onboard ALC897 7.1+2 channel high definition audio controller, support MIC/Line-out. Amplifier support 4 Ω 3W speaker
<b>Expansion</b>	1* M.2 slot, support M.2 Key E 2230 WiFi module
<b>Slot</b>	1*M.2 slot, support M.2 Key B 3042/3052 4G/5G module
<b>Rear I/O Port</b>	2* HDMI1.4 4* USB3.0 2* RJ45 GbE LAN port 1* 2-in-1 audio port, support Line-out, MICK 1* 12V DC_In
<b>Internal I/O Port</b>	1* DC power connector, 1*4pin, support 12V power input output 1* LVDS port, 2*15pin, support dual channel 24BIT. EDP / LVDS share same header pin, selectable via jumper 1* Screen backlight power supply port, 1*6pin 4* USB2.0, 2*5pin 6* RS232 COM port, COM2~3 RS485/RS422 selectable 1* SATA power supply port, 1*4pin 1* Front audio port, 2*5pin 1* Amplifier port, 1*4pin 1* Front panel power button and LED indicator port, 2*5pin 1* TPM port, 2*6pin



<b>Fan</b>	1*4pin CPU smart fan connector, 1*4pin system fan connector
<b>Connector</b>	
<b>GPIO</b>	Support 4-in 4-out GPIO
<b>BIOS</b>	256Mb Flash ROM
<b>Watchdog</b>	Support hardware reset function (L256, 0~255 seconds)
<b>OS Support</b>	Windows 10/Windows 11/Linux
<b>Power Type</b>	Adopt DC 12V power supply
<b>Operating Temp.</b>	-10℃ ~60℃
<b>Storage Temp.</b>	-20℃ ~70℃
<b>Relative Humidity</b>	5%-95% relative humidity, non-condensing
<b>Dimension</b>	148mm x 102mm

## Order Information:

NO.	Model	Processor	Frequency	Memory	HDMI	LVDS	EDP	LAN	USB	COM	485/422	Power
1	EPIC-EH120_1526L VER:1.0(1235U)	1235U	4.4G	1*SODDDR4	2	2ch*24BIT	1	2*I210AT	8	6	COM2/3	DC12V
2	EPIC-EH120_1726L VER:0.1(1255U)	1255U	4.7G	1*SODDDR4	2	2ch*24BIT	1	2*I210AT	8	6	COM2/3	DC12V