

C4350Z-H2 (10210U)



Features

- Onboard Intel® i5-10210U 1.6GHz quad Core CPU
- 2* SODIMM DDR4 RAM slot, 2666MHz, up to 64GB
- Dual 4K display , 1*HDMI1.4, 1*HDMI2.0
- 2* RTL8111H Gigabit Ethernet, support WOL, PXE
- 2* DB9 RS232, support RS485/232 selectable
- 4* USB 3.0, 4* USB2.0
- 1* SIM slot
- DC 12V
- Fanless design


Model No.	C4350Z-H2 V1.0(10210U)	
	Material/Structure	Full aluminum case, fanless cooling
	Color	Iron gray + foggy silver
	Dimension	165*126*56.5MM (L*W*H)
	Installation	VESA mount/Desktop/Embedded
Mainboard	CPU	Onboard 10 th Gen Comet Lake-U i5-10210U 1.6GHz quad Core 8-Thread CPU, TDP 15W
	Graphics	Integrated Intel® UHD Graphics, support DirectX 12 OpenGL 4.5, support 4K
	Memory	2* DDR4 SODIMM RAM slot, 2666MHz, up to 64GB
Front I/O Port	POWER	1* Power button, 1*Reset button , 1* AC LOSS switch (auto power ON/OFF)
	USB	2* USB2.0 , 2* USB3.0
	SIM	1* SIM slot, (need install 3G/4G module)
Rear I/O Port	Display	1 *HDMI1.4 (4096x2304@24Hz), 1*HDMI2.0 (4096x2304@60Hz)
	LAN	2* RTL8111H Gigabit Ethernet, support Wake On LAN、PXE
	USB	2* USB2.0 , 2* USB3.0
	COM	2* DB9 RS232, support RS485/232 selectable, support pin9 charged function
	Audio	1* Line out , 1* MIC
	Power	1* 12V DC_In JACK
Storage	SATA	1* 2.5" SATA hard disk port
	M.2	1* M.2 slot, support M.2 2280 NVME PCIe4/SATA SSD (auto detect)
Expansion	Mini PCIE	1* Mini-PCIE slot, support 4G module
	M.2	1* M.2 slot, support WiFi module
OS Support	Microsoft Windows	Windows 10
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (L256 , 0~255 seconds)
Power Supply	Power Type	External power adaptor
	Voltage Input	DC 12V
	Consumption	AC TO DC、>60W
Environment	Operating Temp.	-10°C ~ 60°C
	Storage Temp.	-20°C ~ 70°C
	Relative Humidity	5%-95% relative humidity, non-condensing
	Vibration	0.5g rms/5-500HZ/random/operating



Fanless Embedded Computer

All product specifications are subject to change without prior notice

C4350Z-H2 Dimention Drawing

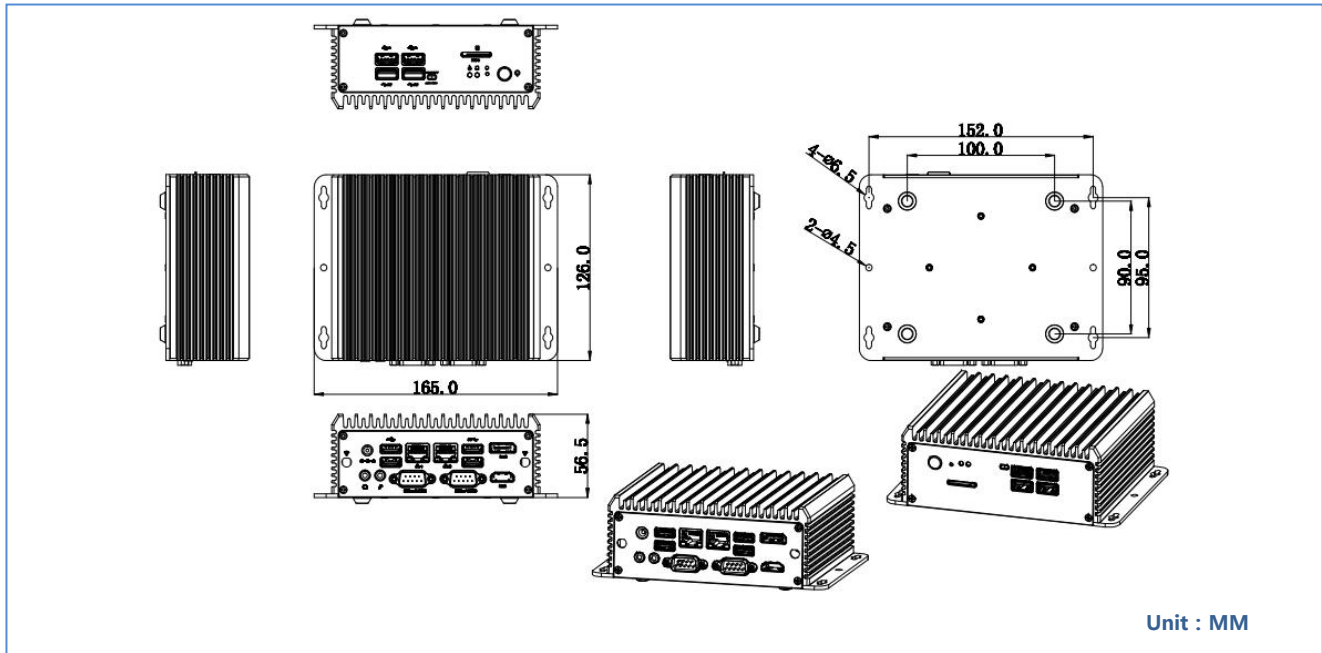

Order Information

No.	Model	Processor	Motherboard	IO Board	Memory	LAN	COM	HDMI	USB2.0	USB3.0	SIM	AUDIO	power
1	C4350Z-H2 V1.0(10210U)	i5-10210U/1.6GHz	N10_I522H	N81-HD	2*SODDR4	2*8111H	2	2	4	4	1	1* Line out 1* MIC	DC 12V
2	C4350Z-H2 V1.0(8265U)	i5-8265U/1.6GHz	N08_I522H	N81-HD	2*SODDR4	2*8111H	2	2	4	4	1	1* Line out 1* MIC	DC 12V
3	C4350Z-H2 V1.0(6200U)	i5-6200U/2.3GHz	N62_I522H	N81-HD	1*SODDR4	2*I211AT	2	2	4	4	1	1* Line out 1* MIC	DC 12V
4	C4350Z-H2 V1.0(5205U)	5205U/ 1.9GHz	N10_C322H	N81-HD	2*SODDR4	2*8111H	2	2	4	4	1	1* Line out 1* MIC	DC 12V

Remark : C4350Z-H2 V1.0 (5205U), aluminum case, with copper bar ;

C4350Z-H2 V1.0(6200U) / C4350S-H2 V1.0(8265U) / C4350S-H2 V1.0(10210U), aluminum case with copper bar and copper tube



Fanless Embedded Computer

All product specifications are subject to change without prior notice