

C4350Z-V

Fanless Cooling Industrial Computer
with 6th Gen Intel® Core i5-6200U



Features

- Onboard 6th Gen Intel® Core i5-6200U/2.3GHz CPU
- 1*DDR4 SODIMM RAM slot, 2133MHz, up to 32GB
- 1*VGA, 1*HDMI dual independent display output
- 2*WGI211AT Gigabit Ethernet, support WOL、PXE
- 2* DB9 RS232 / RS485 / CAN, support the 9th pin charged function
- 4*USB3.0, 4*USB2.0 port
- 1*12V DC_In Jack
- Fanless cooling, full aluminum case
- AC Loss switch (auto power ON/OFF)
- 1* SIM slot

Specification


Model No.	C4350Z-V V1.0(6200U)	
Case	Material/Structure	Full aluminum case, fanless design
	Color	Iron Gray
	Dimension (L*W*H)	141.5*126*56.5MM
	Installation	Desktop/Wall-mount
Motherboard	CPU	Onboard 6 th Gen Intel® i5-6200U 2.3GHz dual Cores 4-Threads processor, TDP 15W
	Chipset	SOC
	Graphics	Integrated Intel® Graphics520, support DirectX 12 OpenGL 4.5, support 4K/60Hz
	Memory	1*DDR4 SODIMM RAM slot, 2133MHz, up to 32GB
Front I/O Port	POWER	1*Power switch , 1*Reset switch
	LED	1*P.LED , 1*H.LED
	AC LOSS	1*AC LOSS switch (Auto power ON/OFF)
	USB	2* USB2.0 port , 2* USB3.0 port
	Audio	1* Line out port , 1* MIC port
	SIM	1* SIM slot, 3G/4G module application
Rear I/O Port	POWER	1*2PIN remote control switch
	Display	1*VGA port , 1* HDMI port (4096x2304@24Hz)
	LAN	2* RJ45 Gigabit LAN port, Intel WGI211AT, support Wake On LAN、PXE function
	USB	2* USB2.0 port , 2* USB3.0 port
	COM	2* DB9 RS232 / RS485 / CAN, support the 9th pin charged function
	Power	1* 12V DC_In port
Storage	SATA	N/A
	MSATA	1* MSATA slot, support Intel protocol SSD
	M.2	1* M.2 slot, support M.2 2280 NVME PCIe4 / SATA SSD, auto detect
Expansion	Mini PCIE	1*Mini-PCIE slot, support WiFi/4G module
	M.2	1* M.2 slot , support M.2 Key B 5G module
OS Support	Microsoft Windows	Windows 10 , 64bit(not include OS code)
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (L256 , 0~255 seconds)
Power Supply	Power Type	External power adaptor
	Voltage Input	DC 12V
	Consumption	AC TO DC、36W / 60W
Environment	Working Temp.	-10°C ~ 60°C
	Storage Temp.	-20°C ~ 70°C
	Relative Humidity	5%-95% relative humidity, non-condensing
	Working Vibration	0.5g rms/5-500HZ/random/operating



Fanless Embedded Computer

All product specifications are subject to change without prior notice

Dimension Drawing

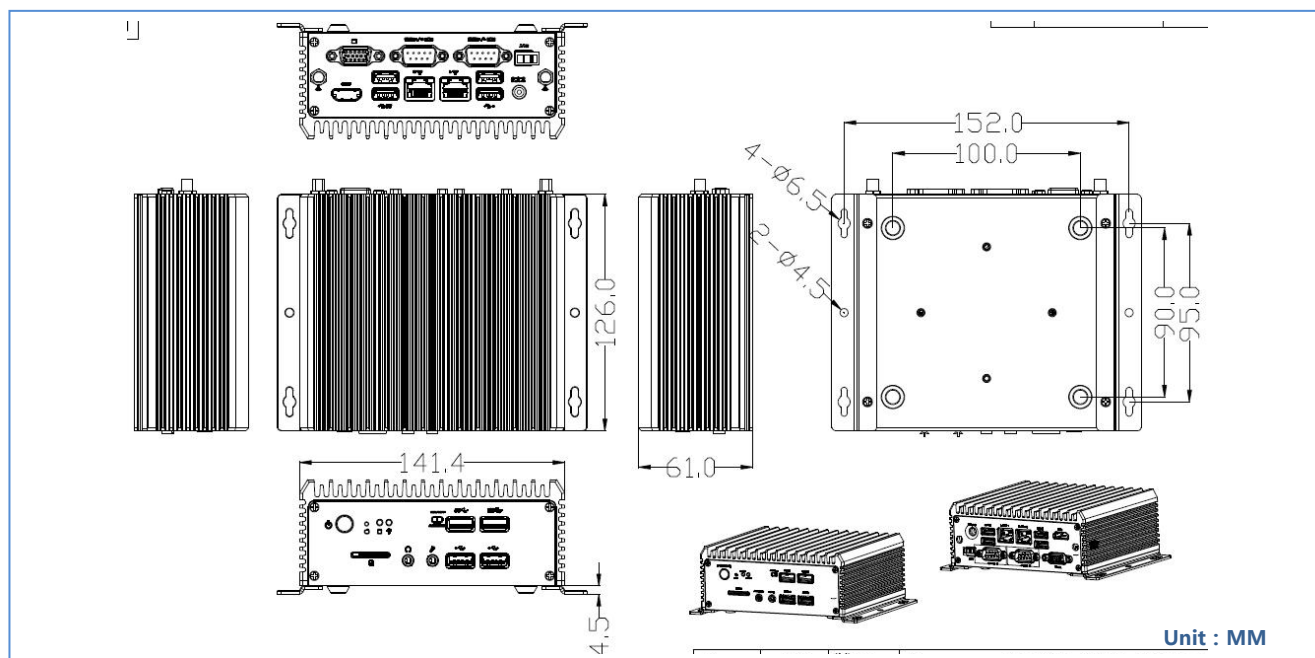

Front I/O View



Rear I/O View



Order Information

No.	Model	Processor	Motherboard	Memory	M.2	LAN	COM	HDMI	VGA	USB2.0	USB3.0	SIM	power-input
1	C4350Z-V V1.0 (10210U)	10210U/1.6GHz	N10_I522H N81-VGA	2*SODDDR4	1	2*RTL8111H	2	1	1	4	4	1	DC 12V
2	C4350Z-V V1.0 (8265U)	8265U/1.6GHz	N10_I522H N81-VGA	2*SODDDR4	1	2*RTL8111H	2	1	1	4	4	1	DC 12V
3	C4350Z-V V1.0 (6200U)	6200U/2.3GHz	N62_I522H N81-VGA	1*DDR4	1	2*WGI211AT	2	1	1	4	4	1	DC 12V
4	C4350Z-V V1.0 (5205U)	5205U/1.9GHz	N10_C322H N81-VGA	2*DDR4	1	2*RTL8111HS	2	1	1	4	4	1	DC 12V
5	C4350Z-V V1.0 (J4125)	J4125/2.0GHz	N41_J122H N81-VGA	2*DDR4	1	2*RTL8111HS	2	1	1	4	4	1	DC 12V

Note: C4350Z-V V1.0 (5205U/ C4350Z-V V1.0 (J4125) use NFC43-L aluminum case , has copper bar within the case for cooling

C4350Z-V V1.0 (6200U/ C4350Z-V V1.0 (8265U)/ C4350Z-V V1.0 (10210U) use NFC43-TG aluminum case, has copper bar + copper tube within



Fanless Embedded Computer