

AX61222TB/AX61220TB


2U Compact Rackmount Chassis

Features


- 2U rackmount design in depth of 450 mm (AX61222TB)/ 475 mm (AX61220TB)
- PICMG SBC structure with 5 free slots for expansion
- Front-accessible one 5.25" HDD drive bay, one slim-line CD-ROM, one 3.5" HDD drive bay and one internal HDD drive bay



ATX6022/6VP4 backplane (up to 4 x PCI, 1 x ISA, 1 x PICMG)

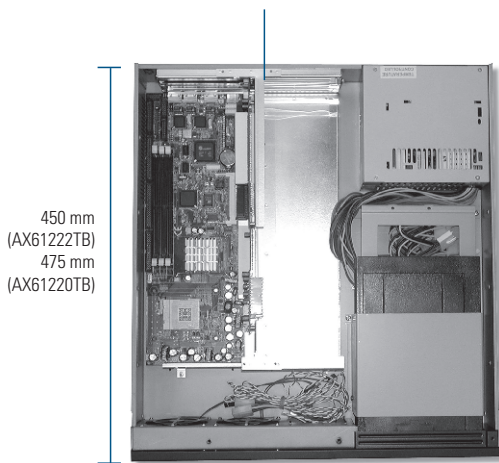


▲ Top view



Removable fan filter on the front panel



Flexible combination of drive bays for removable HDD CD-ROM, FDD, tape drive and hidden HDDs



Optional hot-swap redundant power supply (only for AX61220TB)

Specifications

Standard Color	Black
Construction	Heavy-duty steel
Drive Capacity	Exposed 1 x slim-line CD-ROM; 1 x 3.5" HDD drive bay; 1 x 5.25" HDD drive bay; internal 1 x 3.5" HDD drive bay
Cooling	2 x 8 cm ball-bearing fans (42.5 CFM/each) with a removable filter
Front Panel Indicators	Power On/Off; HDD
Front Panel Controls	1 x power On/Off, 1 x system reset
Front Panel Connectors	2 x USB ; 1 x PS/2 6-pin
Pre-punched Panel	Rear: 1 x 9-pin
System Board	PICMG 1.0 & PICMG 1.3 SBCs

Expansion Interface	ATX6022/6VP4 or FAB105-V1 or FAB205
Operating Temperature	0°C ~ +40°C (+32°F ~ +104°F)
Range Dimensions	481.4 mm (18.95") (W) x 450 mm (17.7") (D) x 88.9 mm (3.5") (H) (AX61222TB) 481.4 mm (18.95") (W) x 475 mm (18.7") (D) x 88.9 mm (3.5") (H) (AX61220TB)
Weight (net/gross)	8.22 kg (18.12 lb)/10.26 kg (22.62 lb) (AX61222TB) 8.6 kg (18.96 lb)/12.02 kg (26.49 lb) (AX61220TB)

