


SYSGAC13 Signal Tower





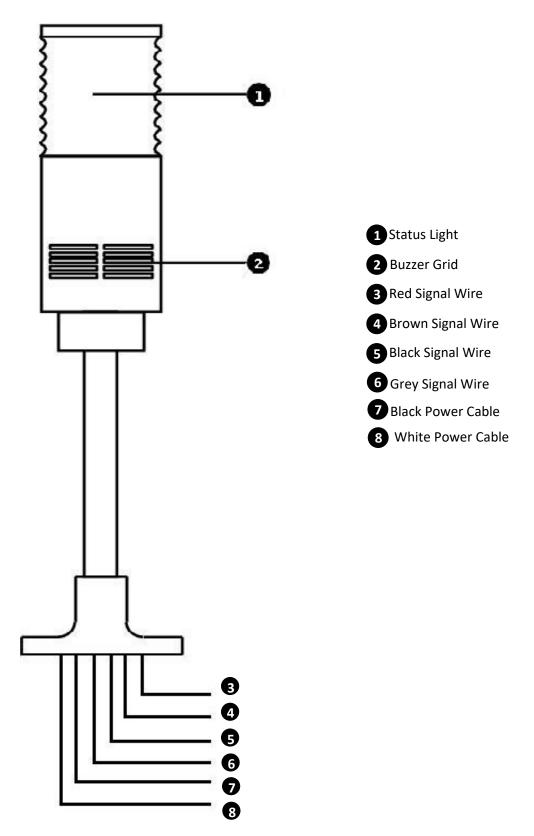

Operational Properties

Feeding Voltage	220 V	
Power Consumption	21 mA (Standby Current)	
Operational Temperature Range	10 +50 °C	
Operational Humidity Range	0 - 70 % Rh	
Storage Temperature Range	2 - 50°C	
Storage Humidity Range	0 - 80 % Rh	
Physical Properties		
Dimensions (H x D)	332 x 45 mm	
Color	White	
Weight	300 grams	
Extra Properties		


5 W Bulb







Sample Connection Diagram

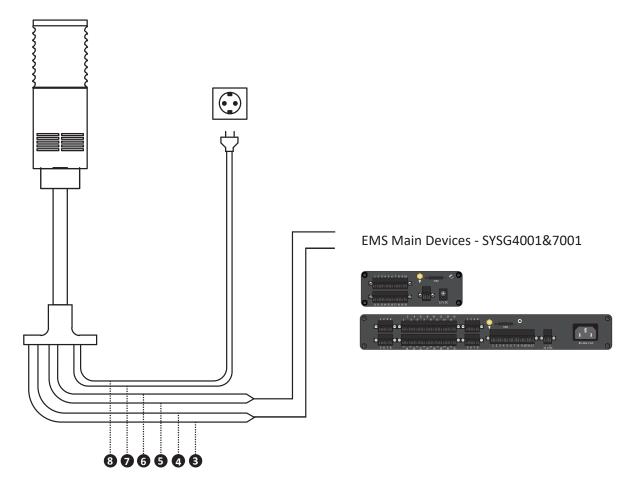

SYSGAC13 Signal Tower can be connected to SYSGuard 7001&4001 EMS Devices directly.

Red&Brown Signal Wires will be connected to COM Ports ; Black&Gray Signal Wires will be connected to NO Ports which are at the rare panel of the devices. Black&White Power Cords will be connected to the mains electricity.





PRODUCT SKU #	BARCODE #	P/N	DESCRIPTION
SYSGAC13	8699931605655	ST45BF-BZ-1	Signal Tower With Buzzer

LIMITED PRODUCT WARRANTY

All ExaGate products are covered with 2 years limited guarantee from the date of original purchase. (Warranty duration may change depending on your country) Your sales or delivery receipt, showing the date of purchase of product is your proof of purchase. ExaGate is obliged to repair or replace the defective hardware (or any part of it's) with no charge to owner.

Conditions Void of Warranty

- Damages on unit, cable or screen. •
- Defections due to electrical wiring and/or city network. •
- Interference to unit by non-authorized staff. •
- Any problems caused by act of nature. •
- Misusage of unit stated by the user manual. •
- Removal or destruction of serial number, warranty labels. •
- Any kind of modifications on unit. •

