



iSN-104-E

Ethernet I/O Module with 4-ch Liquid Leak Detection

Features

- 4-ch Liquid Leak Detection
- Water Leakage and cable break detection triggers and audible alarm
- A mute button to silence the audible alarm
- Five LED indicators to display the status of the power and the alarm
- Liquid Leak Detection Cable and Extended Cable can be up to 500 meters
- Sensitivity adjustable detection
- Supports Modbus TCP/UDP, MQTT
- Includes Redundant Power Inputs: PoE and DC Input



Introduction

The iSN-104-E Liquid Leak Detection Module is a low-cost intelligent liquid leak detection device that can be used to directly control triggers and audible alarm. No additional conversion module is needed and the iSN-104-E can be easily integrated with a variety of monitoring systems to achieve remote alarm and remote device control. The iSN-104-E Liquid Leak Detection module can be used to monitor double-core leader cable lengths of up to 500 meters, and can be used with both the extended cable and its included liquid leak detection cable. The module can be easily integrated with other collection hosts connected to the network. The iSN-104-E is suitable for real-time leak detection in critical locations, such as computer room base stations, warehouses, libraries, museums and industrial sites, and also for air handling equipment, refrigeration units, liquid containers, or pump tanks, etc., where there is a need to monitor any leakage of the equipment.

When required, communication with the iSN-104-E can be programmed based on the Modbus RTU protocol, with the added benefit that different addresses can be configured via hardware to allow for Modbus RTU communication. iSN-104-E with Ethernet and PoE, meaning that the device can be easily integrated into existing HMI or SCADA systems, ensuring trouble-free maintenance in distributed control systems.

Specifications

EMS Protection	
EFT (IEC 61000-4-4)	±4 kV for Power
ESD (IEC 61000-4-2)	±8 kV Air for Random Point
LED Indicators	
Status	1 as Power Indicator 4 as Alarm Indicator
System	
Alarm	For both liquid leak detection and cable-break detection.
Buzzer	Yes. Can be muted by a push button.
Liquid Leak Detection	
Channels	4
Liquid Type	Water, 2uS/cm
Sensor Type	Probe for point detection or Cable for line detection
Max. Cable Length	500 meters Includes liquid leak detection cable and extended cable.
Sensitivity Range	26 KΩ ~ 580 KΩ (rotary switch adjustable)
Cable-break Detection	Yes. For Liquids Leak Detection Cable CA-LLD-DC100X-Lxxx only.


Ethernet	
Ports	1 x RJ-45, 10/100 Base-TX
PoE	Yes
Security	ID, Password and IP Filter
Protocol	Modbus TCP/UDP, MQTT
Power	
Reverse Polarity Protection	Yes
Input Range	10 ~ 48 Vdc
Powered from PoE	Yes, IEEE 802.3af, Class 1
Consumption	1.6 W Max.
Mechanical	
Dimensions (mm)	72 x 95 x 57 (W x L x H)
Installation	DIN-Rail Mounting
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-30 ~ +80°C
Humidity	10 ~ 90% RH, Non-condensing

Applications


The iSN-104-E is a leakage detection module used in water pipe leak monitoring in buildings with two working modes.

1. Work with the Liquids Leak Detection Cable that installed near the possible leaking pipe or area to detect leakage and cable break with alarm.
2. Work with the leakage probe that installed in fixed possible leak locations to detect.

The leakage monitoring is applied to the water pipes, fire pipes and sewage pipes of buildings, as well as the detecting of domestic water, drainage and electric equipment, which can effectively achieve water saving and ensure the safety of living. The iSN-104 can detect leakages, send out signal and alarms, combine with the WISE IoT Edge Controller or TPD/VPD Touch HMI, and to further integrate with the mobile APP or community system.

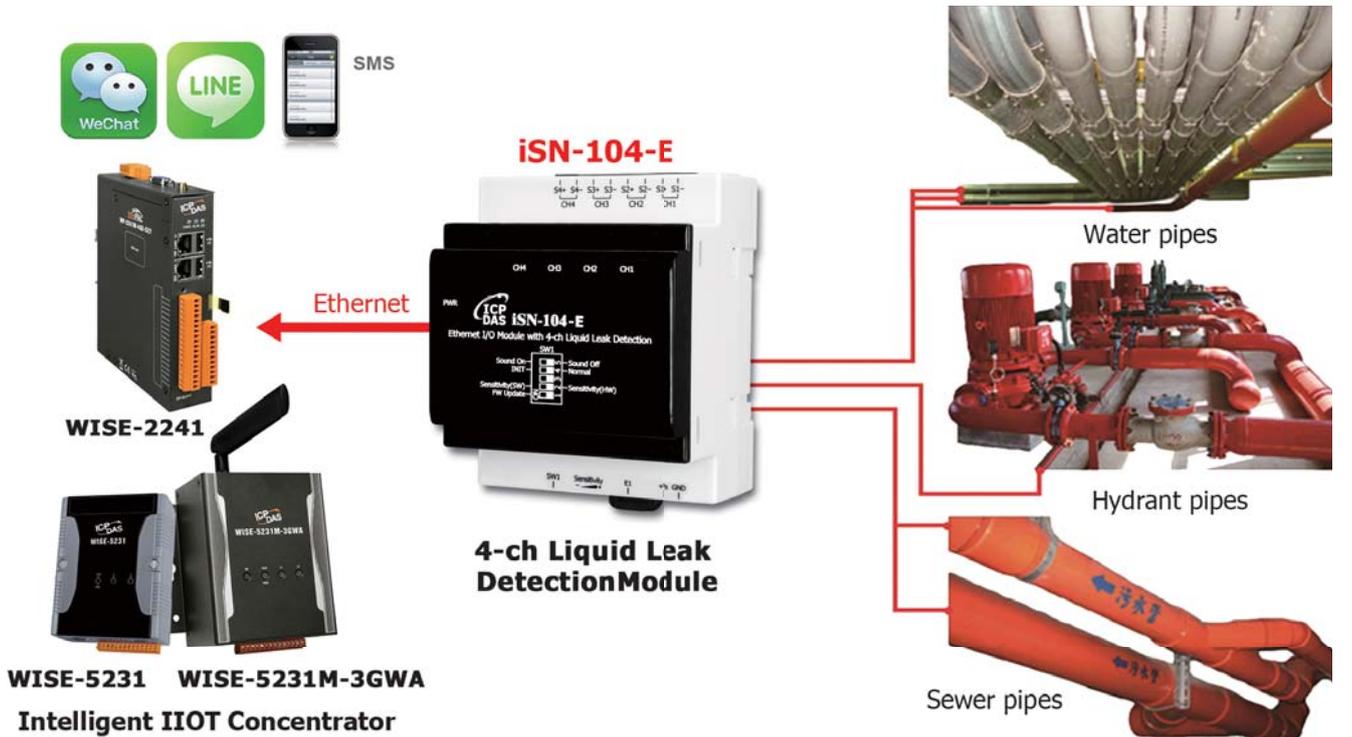


Wire Connections

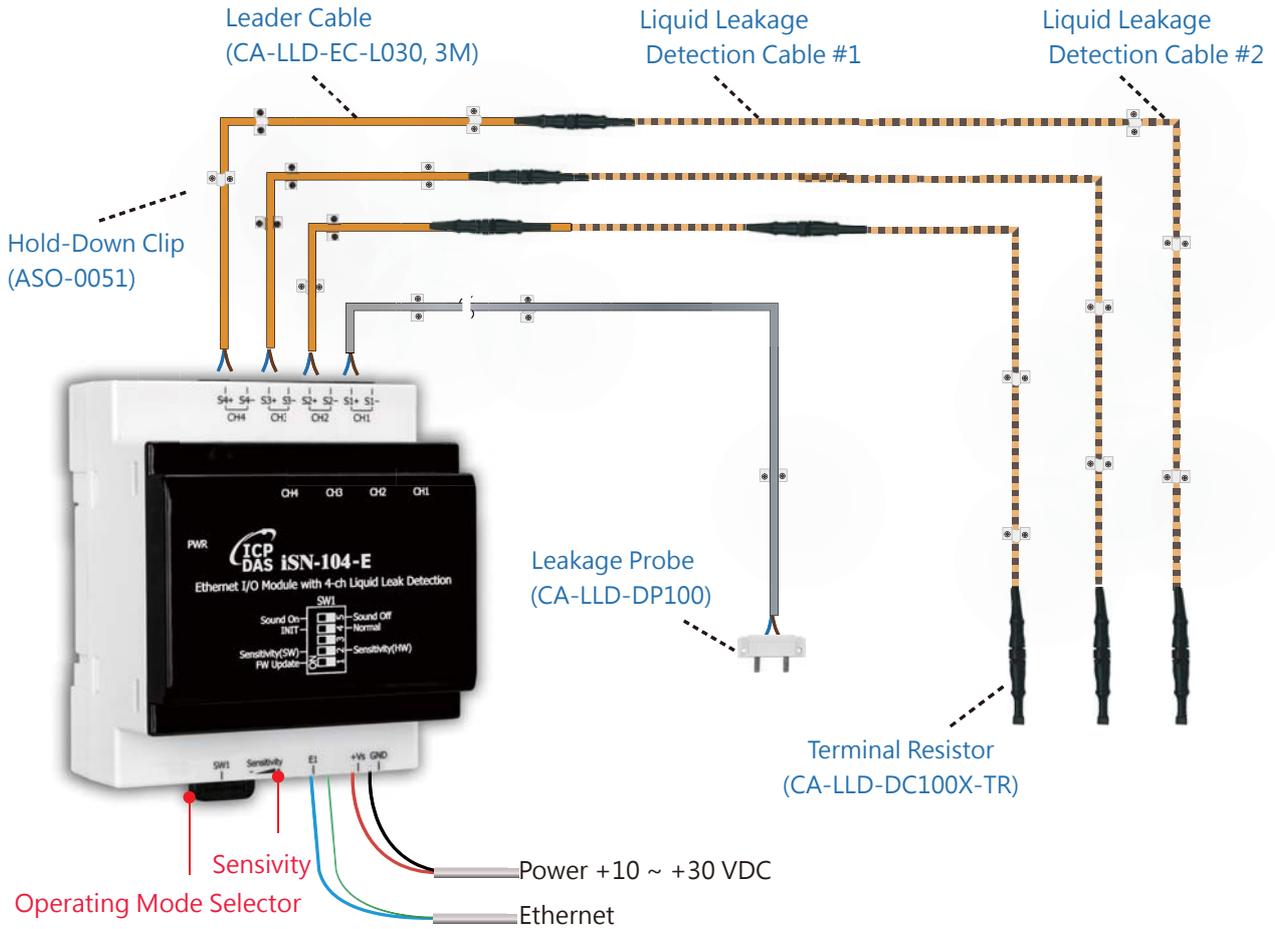


Configuration

DIP Switch Description			
 ON DIP 1 2 3 4 5	SW1	ON	FW Update
		OFF	-
	SW2	ON	Sensitivity(SW)
		OFF	Sensitivity(HW)
	SW3	ON	-
		OFF	-
	SW4	ON	INIT
		OFF	Normal
	SW5	ON	Sound On
		OFF	Sound Off

PIN Assignments

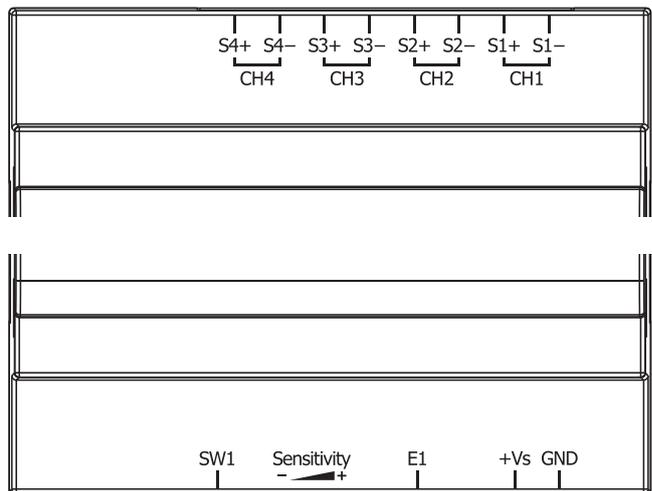

■ Dimensions (Units: mm)/PIN Assignments

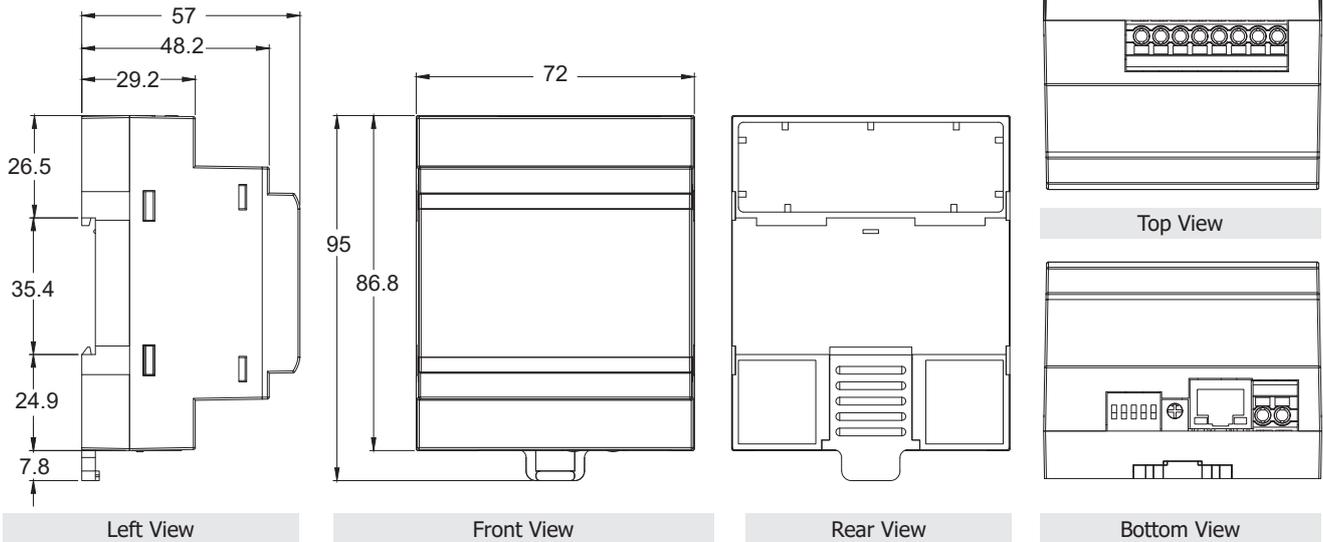

■ Ordering Information

ISN-104-E CR	Ethernet I/O Module with 4-ch Liquid Leak Detection (RoHS)
---------------------	--

■ Accessories

	CA-LLD-DC100-L100 CA-LLD-DC100-L300 CA-LLD-DC100-L500	Liquids Leak Detection, Water Detection Cable w/o Position, 10 m/ 30 m/ 50 m length (RoHS)		CA-LLD-DC100X-TR	Terminal Resistor, 2 MΩ (RoHS)
	CA-LLD-DC100X-L010 CA-LLD-DC100X-L030 CA-LLD-DC100X-L100 CA-LLD-DC100X-L300 CA-LLD-DC100X-L500	Liquids Leak Detection, Water Proof Plug Male to Female Cable, 1 m/ 3 m/ 10 m/30 m/ 50 m (RoHS)		CA-LLD-DP100	Leakage Probe (RoHS)
	CA-LLD-EC-L030	Leader Cable, 3 m (RoHS)		ASO-0052	90 Hold-Down Clip (include 50 pcs)(RoHS)
				ASO-0051	180 Hold-Down Clip (include 50 pcs)(RoHS)

Liquids Leak Detection = LLD

CA-LLD- A A B B B -L C C C

DC : Liquids Leak Detection Cable



EC : Extension Cable



DP : Detection Probe



100 : Liquids Leak Detection Cable



100X : Liquids Leak Detection Cable, can be connected in series



Length

010 : 1 m
030 : 3 m
100 : 10 m
300 : 30 m
500 : 50 m

TR : Terminal Resistor

