

Features

- Built-in Web Server
- Support Modbus TCP/UDP Protocols
- Powerful 32-bit MCU Handles Efficient Network Traffic
- 2-port Ethernet Switch (LAN Bypass) for Daisy-Chain Wiring
- Dual Watchdog
- I/O Pair Connection (Push and Polling)
- Easy Firmware Update via Ethernet
- LED Display to Indicate the I/O status
- 16-ch digital output selectable as either sink- or source-type via wire connection
- Wide Operating Temperature Range: -25 ~ +75°C



Introduction

The ET-2242U provides 16 sink- or source-type Digital Output channels by wire connection and each channel can drive 500 mA load. There are configurable power-on and safe values for digital output. With 2 Ethernet ports, the ET-2242U allows daisy chain connection which permits the flexibility in locating devices, eases installation and lowers infrastructure costs. It features 8 kV ESD protection, 4 kV EFT protection, 3 kV surge and 3000 Vdc I/O isolation to enrich the noise protection ability for industrial environment.

System Specifications

System		
CPU		32-bit ARM
Communication		
Ethernet Port		2 x RJ-45, 10/100 Base-TX, Switch Ports
Protocol		Modbus TCP, Modbus UDP
Security		Password and IP Filter
I/O Pair Connection		Yes (Push, Polling)
Dual Watchdog		Yes, Module, Communication (Configurable)
LAN Bypass		Yes
LED Indicators		
System Running		Yes
Ethernet Link/Act		Yes
DI/DO status		Yes
2-Way Isolation		
Ethernet		1500 Vdc
I/O		3000 Vdc
EMS Protection		
ESD (IEC 61000-4-2)		±8 kV Contact for Each Terminal and ±15 kV Air for Random Point
EFT (IEC 61000-4-4)		±4 kV for Power Line
Surge (IEC 61000-4-5)		±2 kV for Power Line
Power		
Reverse Polarity Protection		Yes
Powered from Terminal Block		+10 ~ +48 VDC
Consumption	24 VDC	2.3 W (Max.)
	48 VDC	2.6 W (Max.)
Mechanical		
Dimensions (L x W x H)		127 mm x 33 mm x 99 mm
Installation		DIN-Rail Mounting
Environment		
Operating Temperature		-25 ~ +75°C
Storage Temperature		-30 ~ +80°C
Humidity		10 ~ 90% RH, Non-condensing


I/O Specifications

Digital Output	
Channels	16
Type	Push-Pull
Sink/Source (NPN/PNP)	Sink/Source
Load Voltage	+3.5 V ~ +80 V
Max. Load Current	500 mA/Channel
Overload Protection	-
Overvoltage Protection	-

Wire Connections

Output Type	ON State Readback as 1	OFF State Readback as 0
Sink		
Source		

Pin Assignments

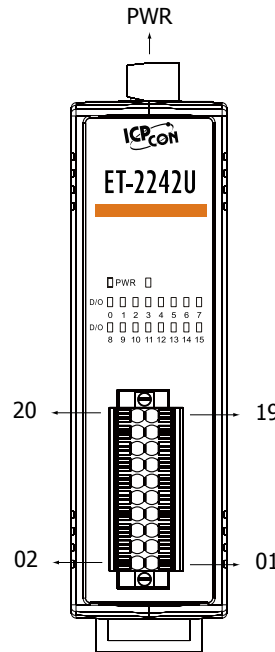

Terminal No.	Pin Assignment
PWR	F.G. GND + Vs
ETH1	
ETH2	

Terminal No.	Pin Assignment	Pin Assignment	Terminal No.
20	DO7	DO15	19
18	DO6	DO14	17
16	DO5	DO13	15
14	DO4	DO12	13
12	DO3	DO11	11
10	DO2	DO10	09
08	DO1	DO9	07
06	DO0	DO8	05
04	DO.COM	DO.COM	03
02	DO.COM	DO.COM	01

Ordering Information

ET-2242U CR	Ethernet I/O Module with 2-port Ethernet Switch, 16-ch Sink-/Source-type Digital Output (RoHS)
--------------------	--

Related Products

NS-205 CR	Unmanaged 5-Port Industrial Ethernet Switch with Power Input +10 ~ +30 Vdc (RoHS)
NS-208 CR	Unmanaged 8-port Industrial 10/100 Base-TX Ethernet Switch with Power Input +10 ~ +30 Vdc (RoHS)
DIN-KA52F CR	24 V/1.04 A, 25 W Power Supply with DIN-Rail Mounting (RoHS)
GPSU06U-6	24 V/0.25 A (max.) Power Supply