




BACnet Series Products



BACnet/IP to Modbus TCP Gateway



GW-5493

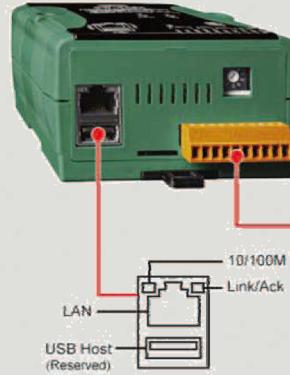

| | | |
|-------|-------|------|
| RxD | COM1 | (10) |
| TxD | COM2 | |
| GND | COM3 | |
| Data+ | COM4 | |
| Data- | COM5 | |
| RxD | COM6 | |
| TxD | COM7 | |
| +VS | COM8 | |
| GND | COM9 | |
| F.G. | COM10 | |

Pin Assignment

GW-5493 is a fully configurable universal BACnet/IP (Server) to Modbus TCP (Client) gateway which is used to make Modbus TCP devices accessible on a BACnet network. The GW-5493 contains a large number of BACnet objects (AI, AO, AV, BI, BO, BV, MSI, MSO, MSV) gives you flexibility in mapping Modbus TCP registers to any combination of BACnet objects. Multiple BIBBs (DS-RP-B, DS-RPM-B, DS-WP-B, DS-WPM, DS-COV-B...etc.) are supported. All the data transfer is configurable using a standard Web browser.


Features

- Read/Write any standard Modbus register via BACnet
- Fully Compliant with BACnet/IP Server
- Fully User Configurable Modbus TCP Client
- Modbus register mapping configured via web interface

BACnet Support

| | |
|---------|--|
| Objects | Binary Input / Binary Output / Binary Value / Analog Input / Analog Output / Analog Value / Multi-state Input / Multi-state Output / Multi-state Value / Device |
| BIBBs | DS-RP-B, DS-RPM-B, DS-WP-B, DS-WPM-B, DS-COV-B, DM-DDB-B, DM-DOB-B, DM-DCC-B, DM-TS-B, DM-UTC-B, DM-RD-B |

Utility Features

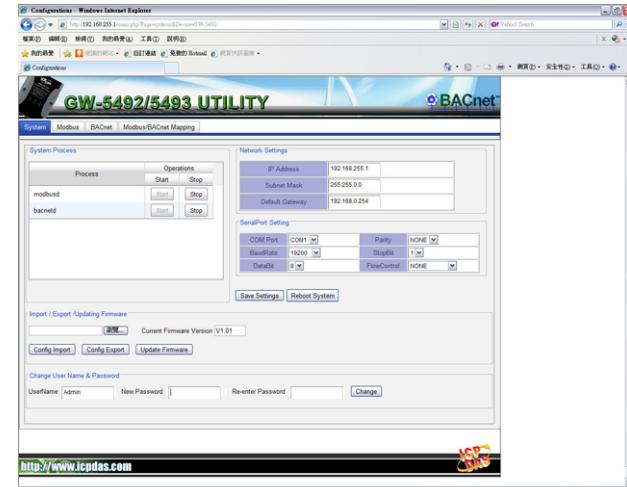

- Configured via standard web browser
- Provide Modbus network configuration interface
- Provide BACnet configuration interface


Modbus RTU Support

| | |
|------------------|---|
| Function Code | 0x01, 0x02, 0x03, 0x04, 0x05, 0x06, 0x10, 0x0F |
|------------------|---|

Hardware Specifications

| System | |
|---------------------|--|
| CPU | 32-bit |
| SDRAM | 64 MB |
| Flash | 64 MB |
| EEPROM | 16 KB |
| Communication Ports | |
| COM1 | RS-232 (Rx,D, Tx,D, and GND); Non-isolation |
| Ethernet | 10/100Base-TX Ethernet Controller |
| Protocol | |
| Modbus | Modbus TCP Client |
| BACnet | BACnet/IP Server |
| BACnet Objects | BI, BO, BV, AI, AO, AV, MSI, MSO, MSV (Maximum: 200 each) |
| BIBBs | DS-RP-B, DS-RPM-B, DS-WP-B, DS-WPM-B, DS-COV-B, DM-DDB-B, DM-DOB-B, DM-DCC-B, DM-TS-B, DM-UTC-B, DM-RD-B |
| Mechanical | |
| Dimensions | 91mm x 132mm x 52mm(W x L x H) |
| Installation | DIN-Rail |
| Environment | |
| Operating Temp. | -25 ~ +75 °C |
| Storage Temp. | -30 ~ +85 °C |
| Humidity | 5 ~ 90% RH, non-condensing |
| Power | |
| Power Input Range | +10V to +30VDC |
| Isolation | 1 kV |
| Consumption | 4.8 W (0.2 A @ 24 VDC) |

Applications

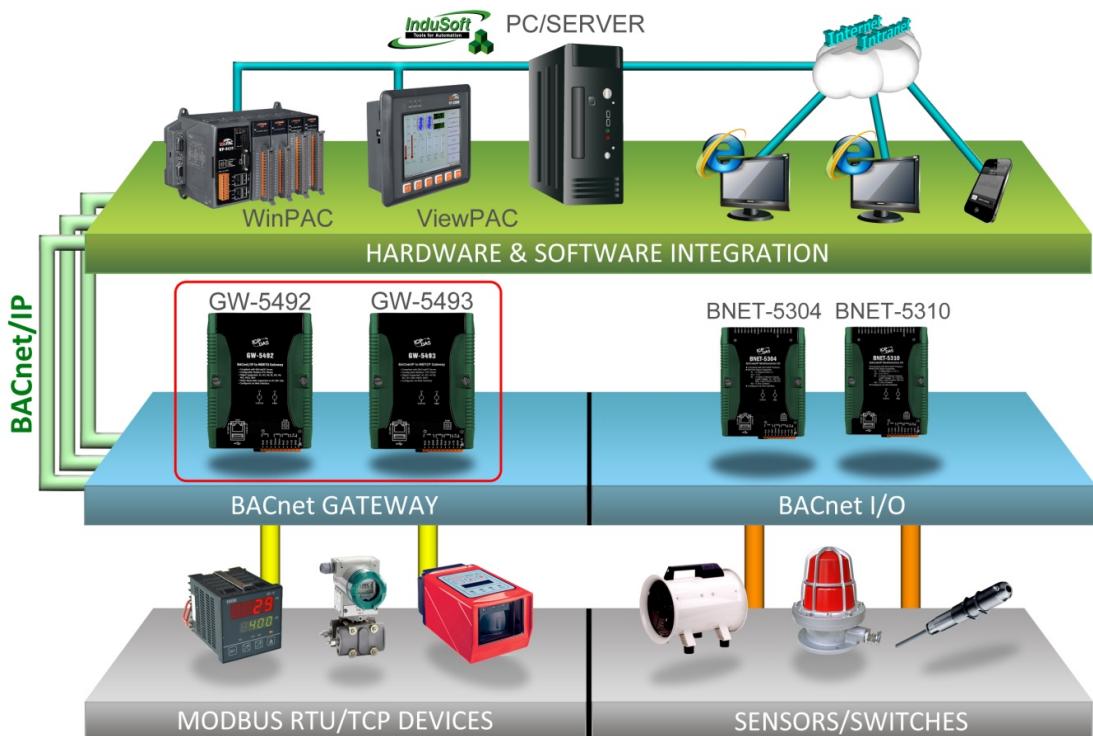

Ordering Information

| | |
|---------|---------------------------------|
| GW-5493 | BACnet/IP to Modbus TCP Gateway |
|---------|---------------------------------|