
$RACK-2100G \ \ {}^{\scriptscriptstyle 2\textit{U}\,6\text{-slot}\,\textit{Full-size}\,\textit{Rackmount}\,\textit{Chassis}}$



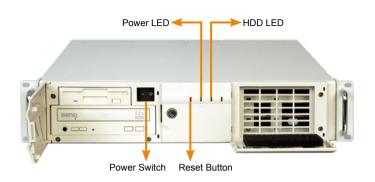

CD-ROM, and HDD are not included in package

Features

- RoHS compliant design
- Stylish front panel with keylock
- One 5.25" and one 3.5" drive bays
- Two 8 cm cooling fans with easy replaceable fan filter
- Lockable door prevents unauthorized access

Specifications

◆ Construction	Heavy duty metal with plastic front panel	
♦ SBC Form Factor	Full-size, slot CPU card	
♦ Drive Bays	1 x Front accessible 3.5" 1 x 3.5" HDD (internal) 1 x 5.25"	
♦ Cooling Fans	2 x 8 cm	
♦ Expansion Slots	6 slots	
♦ Indicators	Power, HDD	
♦ Buttons	Power switch, reset button	
♦ Operating Temperature	0°C ~ 50°C	
♦ Operating Humidity	10% ~ 90%	
♦ Color	W: White/B: Black	
♦ Weight (Net/Gross)	7.8 kg/11.8 kg	
♦ Dimensions (DxWxH)	576.9 mm x 431 mm x 88 mm	


Selection Guide

Model No.	SBC Type	PSU Type	Color Options
RACK-2100G	PICMG 1.3	PS/2	Black/White

Ordering Information

Part No.	Description		
RACK-2100GB/A130B	2U 6-slot full-size rackmount chassis for PICMG 1.3 SBC, white, 2 x 8 cm fan, with ACE-A130B-RS (300W ATX model), RoHS		

Dimensions (Unit: mm)

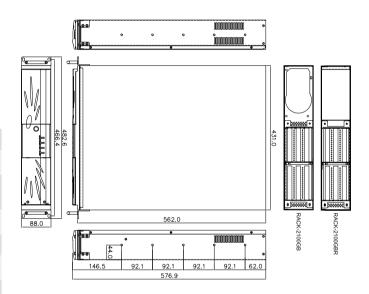

Backplane Options

Model No.	SPC Tuno	PCI ISA	PCle			PSU	
Model No. SBC Type	SBC Type		ISA	x1	х4	x16	Connector
PE-6SD	PICMG 1.3	0	0	3	0	1	ATX
PE-6SD3-RS	PICMG 1.3	2	0	0	1	1	ATX

Power Supply Options

Туре	Model No.	Watt
АТ	ACE-925AP-U-RS	250W
	ACE-935AL-RS	300W
ATX	ACE-A130B-RS	300W
	ACE-A140A-S-R11	400W

For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.