

## TKV-012-12-QUAD-DGI-IP65-MODUL

## TKV-012-12-QUAD-DGI-IP65-BACKL-MODUL



### TECHNISCHE DATEN

Tastenzahl:	12
Tastenform:	quadratisch
Tastengröße:	12 mm (Durchmesser)
Schalttechnologie:	Digi-Inox (Metall-Schnappscheibe)
Schaltkraft:	4,5 N
Schaltweg:	0,6 mm ± 0,1 mm
Schaltzyklen:	ca. 3 Mio. (pro Taste)
Schutzgrad (max.):	IP65
Stoßfestigkeitsgrad:	IK08
Bauform:	Frontplatte mit Gewindebolzen (Fronteinbau)
Frontplattenmaterial:	Edelstahl
Besonderheit:	verfügbar mit Hintergrundbeleuchtung
Schnittstelle:	Matrix (Steckverbinder) Optionaler USB-Controller auf Anfrage
Betriebstemperatur:	-10 °C bis +70 °C
Lagertemperatur:	-25 °C bis +85 °C
Abmessungen:	93 x 73 x 17 mm


### SPECIFICATION

Number of keys:	12
Key shape:	square
Key size:	12 mm (diameter)
Keyswitch technology:	Digi-Inox (metal dome)
Operating force:	4.5 N
Switch travel:	0.6 mm ± 0.1 mm
Switching cycles:	approx. 3mill. (per key)
Protection level (max.):	IP65
Impact protection rate:	IK08
Housing type:	front plate with threaded bolts (front mounting)
Front plate material:	stainless steel
Feature:	available with backlight
Interface:	matrix (plug connector) optional USB plug on request
Operating temperature:	-10 °C to +70 °C
Storage temperature:	-25 °C to +85 °C
Dimensions:	93 x 73 x 17 mm

GETT Kat. Nr. GETT Cat. No.	Original Art.-Nr. des Herstellers Original Art. No. of the Manufacturer	GETT Produktbezeichnung GETT Product Code	Hintergrundbeleuchtung Backlight
KV21230	DGI.12Q12.F	TKV-012-12-QUAD-DGI-IP65-MODUL-MATRIX	
KV21206	DGI.12Q12.F-B	TKV-012-12-QUAD-DGI-IP65-BACKL-MODUL-MATRIX	X

Andere Layouts, Konfigurationen und Schnittstellen auf Anfrage. / Other language versions / interfaces / configurations available on request.

## TECHNISCHE ZEICHNUNG / TECHNICAL DRAWING

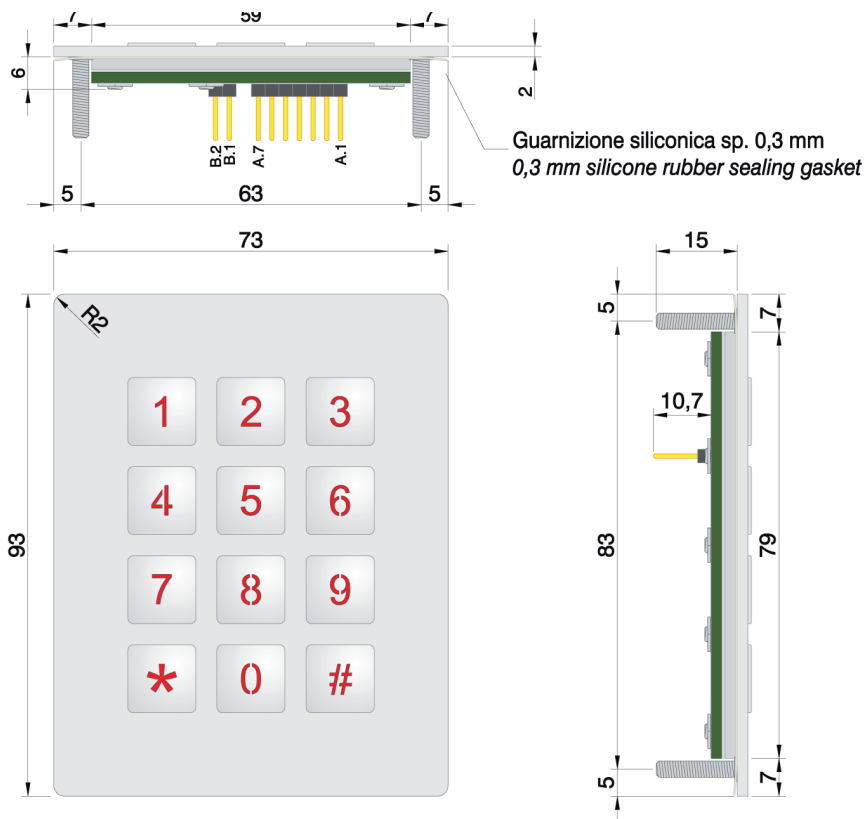

### Pin-Out

	A.1	A.2	A.3
A.4	1	5	9
A.5	3	7	*
A.6	4	8	#
A.7	2	6	0

B (retroilluminazione opzionale)  
B (optional back-lighting)

B.1 — +12Vcc  
B.2 — GND

### Cutout consigliato *Suggested Cut-out*

