

8MP GMSL2G CAMERA

GENERAL DESCRIPTION

The camera is equipped with OMNIVISION CMOS image sensor OX08D10 and Maxim GMSL2. It has an automotive-grade sensor with a well-tuned Image Signal Processor (ISP) that produces exceptional image quality, which comes with an IP67-rated enclosure – is supplied with an AA lens that is focused and glued in our factory.



KEY PARAMETERS

Sensor	OMNIVISION 8.3MP OX08D10 RGGB
ISP	GW5300
Image Size	1/1.73 inch CMOS
Output Pixels	3840H*2160V
Pixel Size	2.1um*2.1um
Frame Rate	Max 45fps
HDR Support	Yes
LFM	Yes
Output data	YUV422@8bit
Serializer	MAXIM MAX96717G
Camera Interface	GMSL2
Power Supply	9~16V POC
Current	<400mA@12VDC
Connector	Amphenol Fakra (Z Code)
Operating temp. range	-40~+85°C
Dimensions	W: 30mm, L:30mm, H:22.57mm
Weight	<80g



Features

- Output format: Uncompressed YUV422 format
- S-mount IP67 compliant lens focused and glued at our factory;
- Multi-Camera synchronization Support;
- Support different focal length lens;



Application

- Automotive
- ADAS + Viewing Fusion
- High Dynamic Range Imaging
- Autonomous Driving
- Robots

**HARDWARE SETTING**

Serializer	
Model	Max96717G
I2C Address	0x80 (8bit address)
Rate	GMSL2 (6G bps)

ISP	
Model	GW5300
I2C Address	0xDA (8bit address)
Reset	Controlled by Max96717G MFP0


Sensor	
Model	OX08D10
I2C Address	0x6C (8bit address)
Frame Sync	Controlled by Max96717G MFP7

Interface Circuit Diagram





BLOCK DIAGRAM

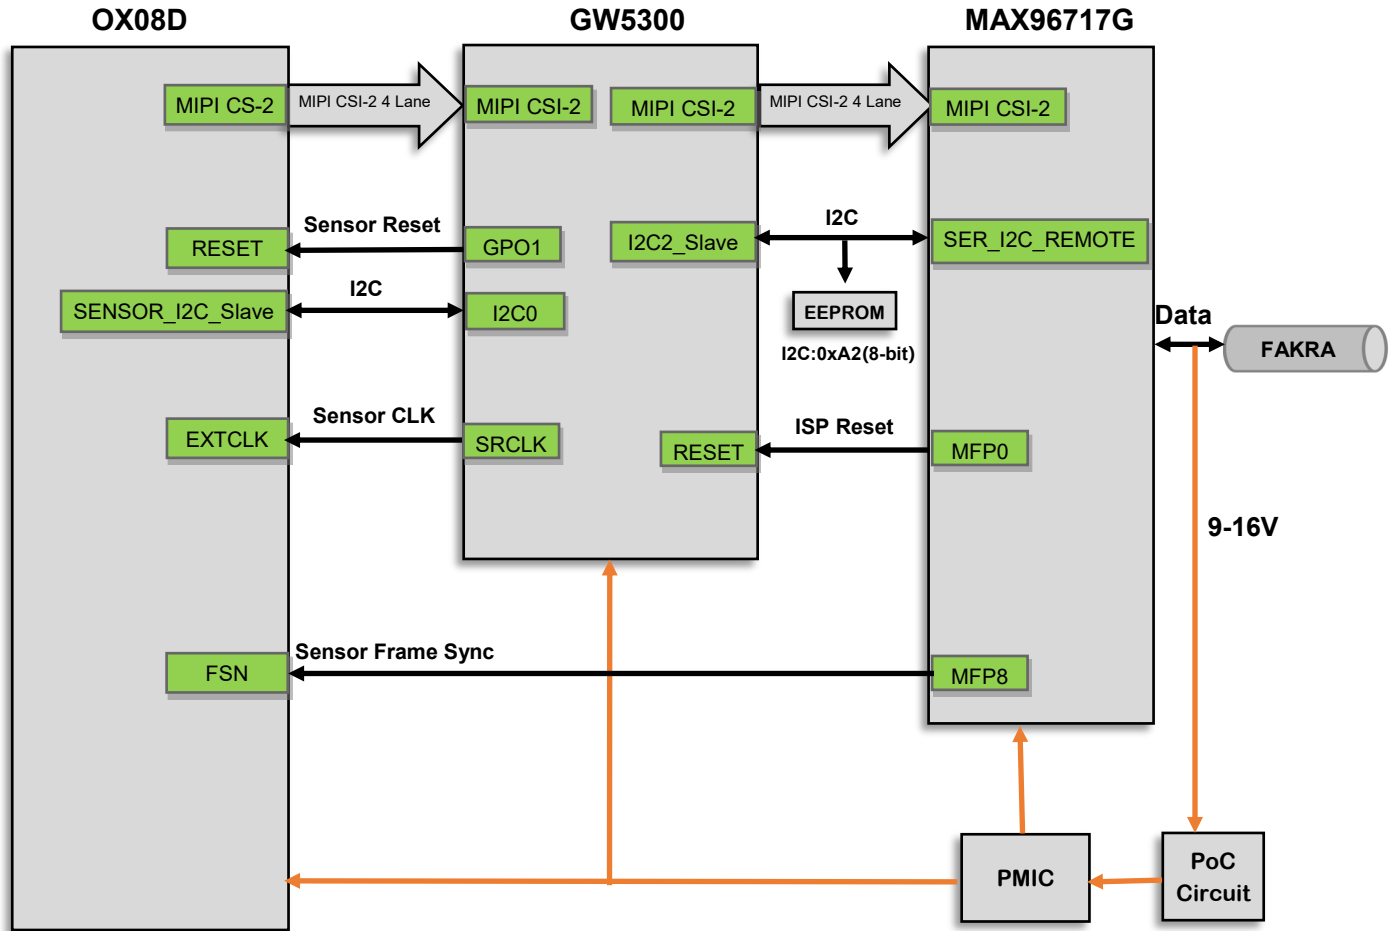**Block Diagram**

※ The camera has an ISP image sensor, which outputs YUV data, and the backend does not need to configure the image sensor, only SerDes;

※ Support store camera internal parameters, if you need to obtain the internal parameters reading method, please note before placing the order






MODEL AND LENS

Model	HFOV	VFOV	F.No	EFL	Max Optical Distortion	Water-proof	Lens Mount
JV8-OX08DC-5300-G2G-H30UA	30°	17°	1.6	15.22mm	-1.8%	IP67	AA
JV8-OX08DC-5300-G2G-H60SA	60°	33°	1.8	7.87mm	-3.5%	IP67	AA
JV8-OX08DC-5300-G2G-H120UA	120°	66°	1.6	3.99mm	-58%	IP67	AA




DIMENSIONS


JV8-OX08DC-5300-G2G-H30UA



Front View

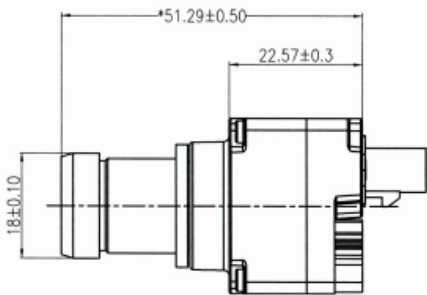

Side View



Rear View

Note:




This icon indicates the imaging direction is positive.






DIMENSIONS


JV8-OX08DC-5300-G2G-H60SA



Front View

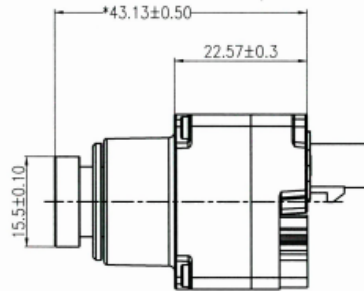


Side View

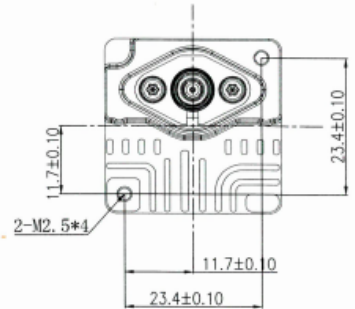


Rear View


JV8-OX08DC-5300-G2G-H120UA



Front View

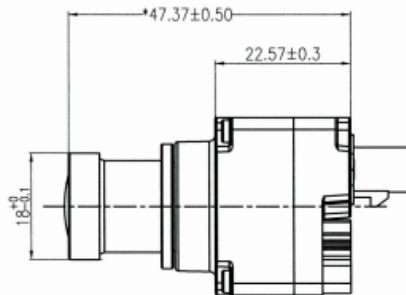

Side View

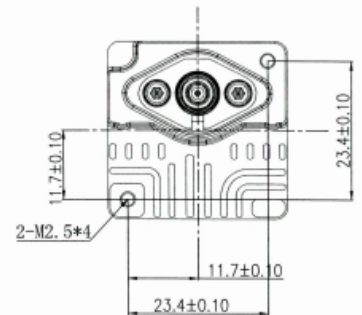

Rear View



Note:



This icon indicates the imaging direction is positive.



PLATFORMS SUPPORT

Platforms	Product Link
NVIDIA Jetson platforms 	Provide development driver package https://www.sensing-world.com/jetson_camera_ecosystem/ 
SerDes Camera to USB Converter	Not supported
CoaxCapture II GMSL Capture Card	Provide development driver package https://www.sensing-world.com/Coaxcapture_Card/ 


※ For development support, please contact Sales@sensing-wolrd.com;





DEVELOPMENT KIT


◇ GMSL Video capture card (Gen2)

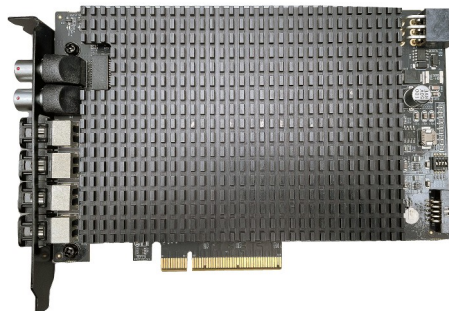


- JV8-OX08DCC-5300-G2G-Hxxx can connect to CCG3-4H/8H .

◇ KEY FEATURES

- CCG3-8H at most can support connect 8* SG8-OX08DC-5300-G2G-Hxxx at the same time ;
- CCG3-4H at most can support connect 4* SG8-OX08DC-5300-G2G-Hxxx at the same time ;
- PCI-e Gen3*8lane and supports x86 architecture;
- Support external trigger synchronization;
- Support GPS Timing synchronization;
- Support network PTP timing synchronization;

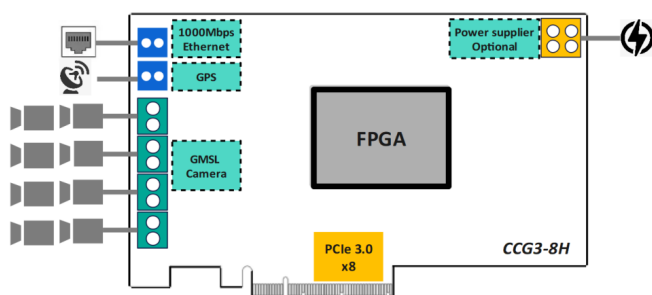

CCG3-8H

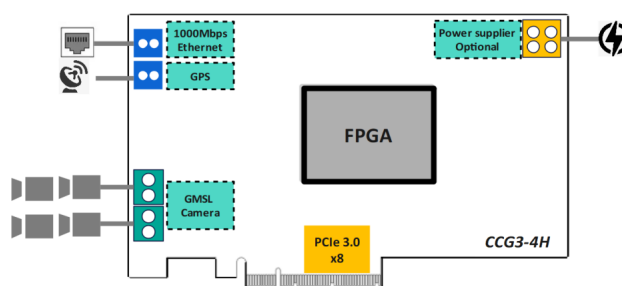

CCG3-4H





ACCESSORIES

◇ Coaxial Cable

Product Name	Order PN#	Specification
Mini-fakra Coaxial Cable 4-in-1(Rosenberg)	R4JC-JC-ZZZZ-0500L	Mini-fakra, 4 in 1, 0.5m, Female to Female
Mini-fakra Coaxial Cable 4-in-1 (TE)	T4JC-PC-ZZZZ-0500A	Mini-fakra, 4 in 1, 0.5m, Male to Female
Mini-fakra Coaxial Cable 4-in-1(Rosenberg)	R4JC-PC-ZZZZ-0500L	Mini-fakra, 4 in 1, 0.5m, Male to Female
Mini-fakra Coaxial Cable 4-in-1 (TE)	T4JC-JC-ZZZZ-0500A	Mini-fakra, 4 in 1, 0.5m, Female to Female
Camera coaxial Cable	SG-JSZPSZ2000L	2M, Male to Female, IP67
Camera coaxial Cable	SG-JSZJSZ2000L	2M, Female to Female, IP67
Camera coaxial Cable	SG-JSZPSZ3000L	3M, Male to Female, IP67
Camera coaxial Cable	SG-JSZJSZ3000L	3M, Female to Female, IP67
Camera coaxial Cable	SG-JSZPSZ5000L	5M, Male to Female, IP67
Camera coaxial Cable	SG-JSZJSZ5000L	5M, Female to Female, IP67
Camera coaxial Cable	SG-JSZJSZ7000L	7M, Female to Female, IP67
Camera coaxial Cable	SG-JSZJSZ8000L	8M, Female to Female, IP67
Camera coaxial Cable	SG-JSZPSZL100L	10M, Male to Female, IP67
Camera coaxial Cable	SG-JSZJSZL100L	10M, Female to Female, IP67
Camera coaxial Cable	SG-JSZJSZL120L	12M, Female to Female, IP67
Camera coaxial Cable	SG-JSZJSZL160L	16M, Female to Female, IP67
Camera coaxial Cable	SG-JSZJSZL200L	20M, Female to Female, IP67





REVISION HISTORY

Version	Description	Release date
Rev1	First release	Mar.2026





WECHAT