




SYSGuard 7030

SYSGuard 7030 Extension Module For Water Detect Cable (Dry Contact)

Product info: The SYSGuard 7030 Extension Module For Water Detect Cable (Dry Contact) extends the range between water detection cables and the main unit, enabling the use of water leak cables over longer distances, ensuring comprehensive monitoring and timely alerts for potential water leaks.

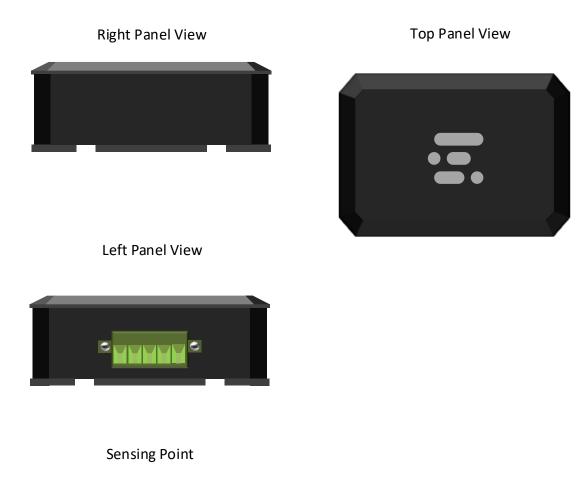

Head Office A: Sehit Ahmet Sokak No:12/1 Mecidiyekoy - Istanbul - Turkey T: +90 212 275 73 22 F: +90 212 275 73 66 E: info@exagate.com

Support support@exagate.com






Operational Properties

| • | • | | |
|--------|---------------------------------|--|--|
| | Power Supply Voltage | 10,5 - 14,4 VDC typical 12 VDC | |
| | Power Consumption | 0,005 - 0,010 A typical 0,009 A | |
| | | 0,084 - 0,14 W typical 0,10 W | |
| | Operational Temperature Range | -25 +70 °C Operational Humidity | |
| | Range | 0 - 85 % Rh Storage Temperature | |
| | Range | -40 +85 °C | |
| | Storage Humidity Range | 0 - 90 % Rh | |
| Physic | al Properties | | |
| | Dimensions (H x W x D) | 50 x 35 x 20 mm | |
| | Color | Grey | |
| | Weight | 100 (+/-5%) grams | |
| | Technical Properties | | |
| | Maximum Distance from Main Unit | 200 m | |
| | External Device Input | YES – 1 Unit | |
| | Power Over ExaBus Port | YES | |
| | ExaBus Port | 1 Unit | |
| | Power Over External Device | NO | |
| | Supported External Devices | Water Detection Cable SYSGuard 7031 SYSGuard 7035 SYSGuard 7001, SYSGuard 4001 | |
| | Supported Main Units | | |
| | | | |





Sample Connection Diagram

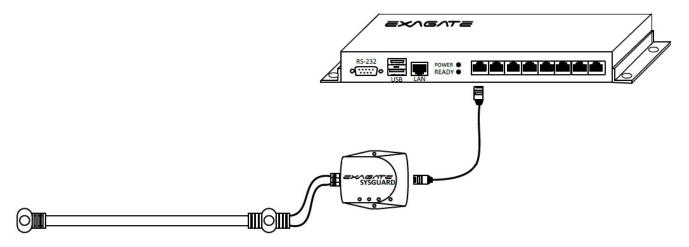

SYSGuard 7031 or SYSGuard 7035 W-Detect Cable connected to SYSGuard 7030 Flood Sensor and SYSGuard 7030 connected to main unit SYSGuard 4001 or SYSGuard 7001

Support support@exagate.com





| PRODUCT SKU # | BARCODE # | P/N | DESCRIPTION |
|---------------|---------------|-------------|--|
| SYSG7030 | 8699931601305 | 7270SE92010 | Extension Module For Water Detect Cable |

LIMITED PRODUCT WARRANTY

All ExaGate products are covered with 2 years limited guarantee from the date of original purchase. (Warranty duration may change depending on your country) Your sales or delivery receipt, showing the date of purchase of product is your proof of purchase. ExaGate is obliged to repair or replace the defective hardware (or any part of it's) with no charge to owner.

Conditions Void of Warranty

- Damages on unit, cable or screen.
- Defections due to electrical wiring and/or city network.
- Interference to unit by non-authorized staff.
- Any problems caused by act of nature.
- Misusage of unit stated by the user manual.
- Removal or destruction of serial number, warranty labels.
- Any kind of modifications on unit.

