



5 100M Ethernet Ports + 2 Serial Ports Managed Industrial Ethernet Switch CLI User Manual

Document Version: 03

Issue Date: 12/27/2022

Preface

Switch CLI user manual has introduced:

- CLI configuration

Audience




This manual applies to the following engineers:



- Network administrators
- Technical support engineers
- Network engineer

Text Format Convention

Format	Description
" "	Words with "" represent the interface words. Such as: "Port No."
>	Multi-level path is separated by ">". Such as opening the local connection path description: Open "Control Panel> Network Connection> Local Area Connection".
Light Blue Font	It represents the words clicked to achieve hyperlink. The font color is as follows: 'Light Blue'.
About this chapter	The section 'about this chapter' provide links to various sections of this chapter, as well as links to the Principles Operations Section of this chapter.

Symbols

Format	Description
 Notice	Remind the announcements in the operation, improper operation may result in data loss or equipment damage.
 Warning	Pay attention to the notes on the mark, improper operation may cause personal injury.
 Note	Make a necessary supplementary instruction for operation description.

Format	Description
 Key	Configuration, operation, or tips for device usage.
 Tips	Pay attention to the operation or information to ensure success device configuration or normal working.

Port Convention

The port number in this manual is only an example, and does not represent the actual port with this number on the device. In actual use, the port number existing on the device shall prevail.

Revision Record

Version No.	Date	Revision note
01	2013-12	Product release
02	10/25/2019	Layout optimization
03	12/27/2022	Product upgrading

Contents

PREFACE	1
CONTENTS	1
1 LOG IN TO THE CLI CONFIGURATION INTERFACE	1
1.1 LOGIN TO THE SWITCH VIA CONSOLE PORT	1
1.2 LOGIN TO THE SWITCH VIA TELNET	3
1.3 COMMAND LINE INTERFACE	5
1.3.1 Command Line Online Help	5
1.3.2 Command Line Common Error	6
1.3.3 History Command	6
1.3.4 Common Command	7
2 INFORMATION CONFIGURATION COMMAND	9
2.1 DISPLAY DEVICE INFORMATION	9
2.2 CONFIGURE DEVICE INFORMATION	9
2.3 CLEAN UP DEVICE INFORMATION	10
3 PORT CONFIGURATION COMMAND	11
3.1 PORT INFORMATION DISPLAY	11
3.2 PORT ENABLE	12
3.3 PORT FLOW CONTROL	12
3.4 PORT SPEED AND WORKING MODE	12
3.5 PORT MDI/MDIX SELF-ADAPTION	13
3.6 PORT TYPE FIBER PORT/COPPER PORT	13
4 BANDWIDTH CONFIGURATION COMMAND	14
4.1 BANDWIDTH CONFIGURATION	14
4.2 BANDWIDTH DISPLAY	15
5 IGMP CONFIGURATION COMMAND	17
5.1 IGMP SNOOPING CONFIGURATION COMMAND	17
6 MULTICAST CONFIGURATION COMMAND	19
6.1 DISPLAY MULTICAST FILTER LIST	19
6.2 ADD STATIC MULTICAST ADDRESS	19
6.3 DELETE STATIC MULTICAST ADDRESS	20
7 VLAN CONFIGURATION COMMAND	21
7.1 VLAN TYPE CONFIGURATION AND DISPLAY	21
7.2 PORT ISOLATION	22

7.3	PORT-BASED VLAN	22
7.4	IEEE802.1Q VLAN	23
8	QOS CONFIGURATION COMMAND	25
8.1	QoS QUEUE MECHANISM CONFIGURATION	25
8.2	ToS AND CoS ENABLEMENT	25
8.3	ToS/CoS VALUE MAPPING	26
8.4	DEFAULT PORT PRIORITY CONFIGURATION	27
8.5	DISPLAY QoS CONFIGURATION INFORMATION	27
9	RING CONFIGURATION COMMAND	29
9.1	ENABLE OR DISABLE RING NETWORK FUNCTION	29
9.2	RING3 CONFIGURATION	30
9.3	DISPLAY RING NETWORK CONFIGURATION INFORMATION	31
9.4	RSTP CONFIGURATION	31
9.5	DISPLAY RSTP CURRENT STATUS	33
10	LLDP CONFIGURATION COMMAND	34
10.1	LLDP ENABLEMENT	34
10.2	DISPLAY LLDP INFORMATION	34
10.3	LLDP CONFIGURATION	35
11	SNMP CONFIGURATION COMMAND	36
11.1	SNMP ENABLE	36
11.2	SNMP CONFIGURATION	36
11.3	SNMP DISPLAY	37
12	SERIAL CONFIGURATION COMMAND	38
12.1	SERIAL PORT INTRODUCTION	38
12.2	SERIAL PORT INFORMATION	38
12.3	SERIAL PORT PARAMETER	39
12.4	COM WORK MODE CONFIGURATION	40
12.5	TCP CLIENT WORKING MODE CONFIGURATION	40
12.6	UDP WORKING MODE CONFIGURATION	41
12.7	TCP SERVER WORKING MODE CONFIGURATION	42
12.8	TCP AUTO WORKING MODE CONFIGURATION	42
12.9	SERIAL PORT ADVANCED MODE	43
12.10	TCP SERVER ADVANCED MODE CONFIGURATION	44
12.11	UDP ADVANCED MODE CONFIGURATION	44
13	ALARM CONFIGURATION COMMAND	45
13.1	ALARM CONFIGURATION/DELETE	45
13.2	DISPLAY ALARM INFORMATION	46
14	STATISTICS CONFIGURATION COMMAND	47
14.1	PORT STATISTICS CONFIGURATION VIEW	47
15	MIRROR CONFIGURATION VIEW	49
15.1	PORT MIRRORING CONFIGURATION/DELETE	49
15.2	DISPLAYS PORT MIRRORING INFORMATION	50
16	EVENTLOG CONFIGURATION COMMAND	51

16.1	LOG INFORMATION ENABLE	51
16.2	LOG INFORMATION TYPE	51
16.3	LOG INFORMATION STATUS DISPLAY	52
17	TIME CONFIGURATION COMMAND	53
17.1	TIME CONFIGURATION	53
17.2	DISPLAYS THE TIME CONFIGURATION VIEW	54
18	MANAGE CONFIGURATION COMMAND	55
18.1	DISPLAY DEVICE NETWORK ADDRESS	55
18.2	NETWORK DIAGNOSIS SETTING	55
18.3	SYSTEM LOG INFORMATION	56
18.4	IP ADDRESS, DEFAULT GATEWAY SETTINGS	56
18.5	SYSTEM TIMEOUT SETTINGS	57
18.6	USER NAME AND PASSWORD SETTINGS	58
18.7	RESTORE FACTORY SETTINGS	58
19	TFTP CONFIGURATION COMMAND	59
19.1	TFTP CONFIGURATION	59
19.2	DISPLAY TFTP CONFIGURATION INFORMATION	59


1 Log in to the CLI Configuration Interface

1.1 Login to the Switch via Console Port

The PC can log in to the command line interface of the device by connecting to the Console port.

Operation steps


Step 1 Connect the serial port of the computer to the Console port of the device through the serial port line to establish a local configuration environment, as shown in the topology diagram below.

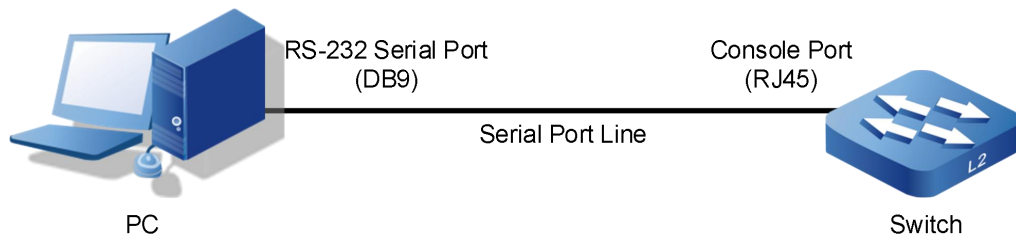

1. Connect DB9 at one end of serial port line to RS-232 serial port of PC.
2. Connect the RJ45 on the other end of the serial line to the Console port of the device.


Note:

Diagram of internal connection line of serial port line/communication cable is shown below.

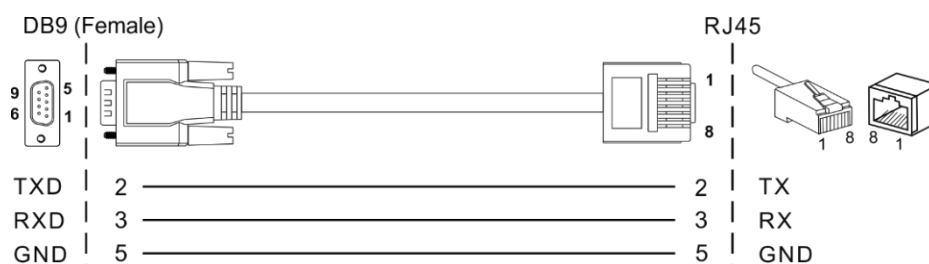


Step 2 Open the terminal simulation software on the PC, create a new connection, and set the interface and communication parameters of the connection. (Using PuTTY as an example here.)

1. Open PuTTY and click "Session" on the menu bar.
2. In the "Basic options for your PuTTY session" input box on the right, do the following:
 - Select "Connection type" to "Serial".
 - Enter "115200" in the "Speed" text box;
 - Click "Open".

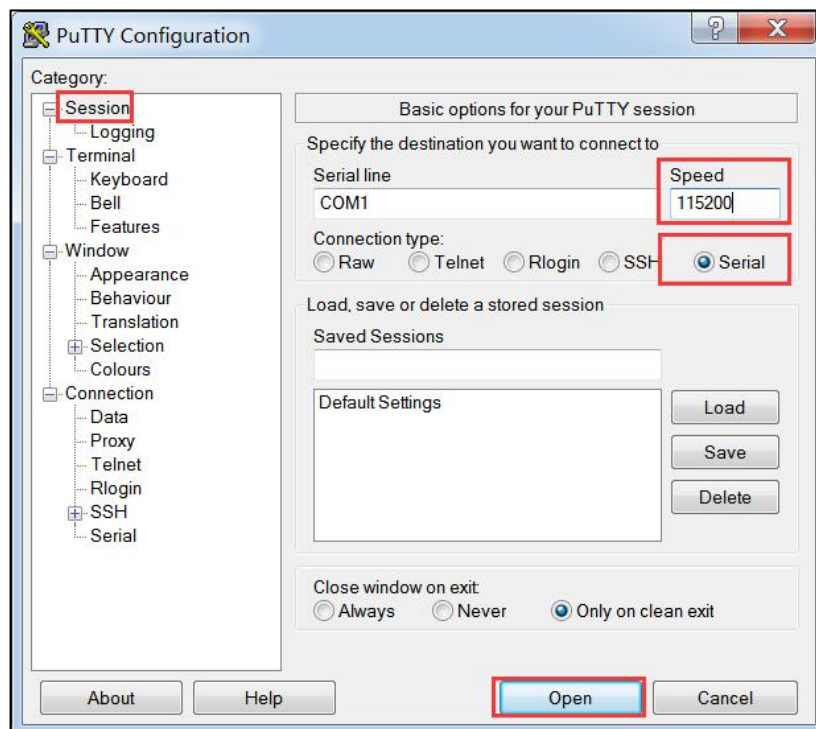

3. The "COM1-PuTTY" command line edit dialog box pops up. Press enter key to enter user name and password. The user name and password of the device are both admin by default, as shown below.

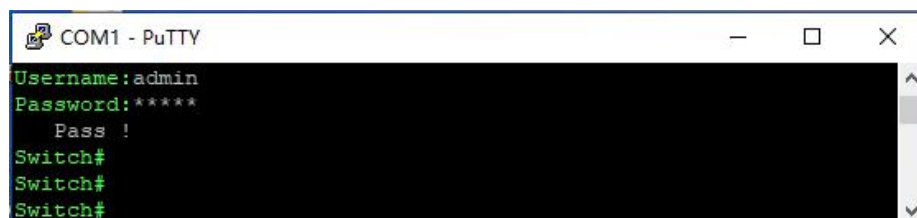

```
COM1 - PuTTY
Username: admin
Password: *****
  Pass !
Switch#
Switch#
Switch#
```

Step 3 End.

1.2 Login to the Switch via Telnet


Through Telnet client login to the command line interface of the device, the client and the device should meet the following requires:

1. Configure the IP address of the switch correctly.
2. If the Telnet client and the device are in the same LAN, the IP address of the device and the client must be configured in the same network segment. Otherwise, the route between Telnet client and device must be accessible.

User can log in to the switch device through the Telnet client and configure the device if the two requires above are met.


Operation Steps

Step 1 As shown in the figure below, set up the configuration environment to connect the Ethernet port of the computer to the Ethernet port of the device through the LAN.

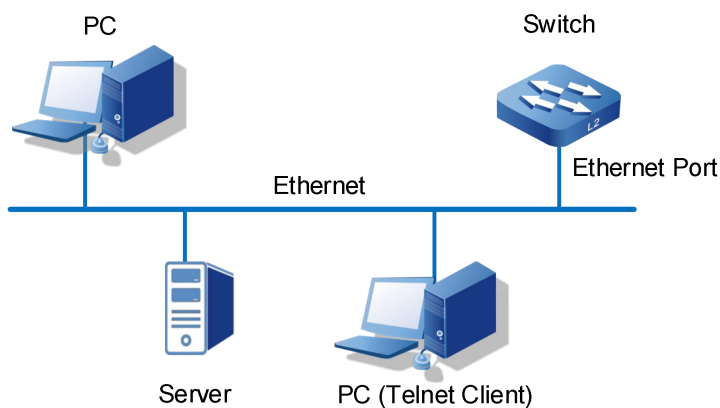

Step 2 Run the Telnet client on the computer and input the administrative IP address of the Ethernet port connected the computer to the switch, as shown in the figure below.


1. Press "Win+R" to pop up the running window;
2. Enter "Telnet+ space + device IP address" in the "Open (O)" input box.
3. Click "OK" button.

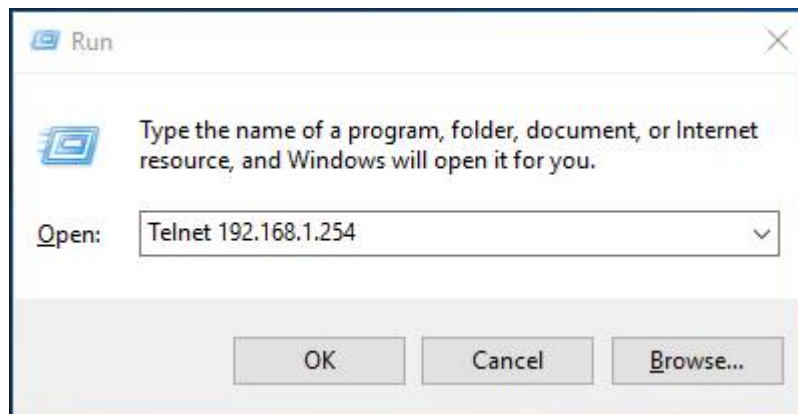


Note:

- Using the command line prompt interface of Win7/Win8/Win10 and other operating systems to configure the device needs to enable Telnet client in advance, user can check and enable Telnet client in the Windows function window under the path of "Control Panel > Program and Function > Enable or Disable Windows function", if Telnet client has been enabled, user can ignore this instruction.
- If the computer operating system does not support Telnet clients, a third party software PuTTY can be used as a Telnet client.
- The default IP address of the device is "192.168.1.254".

Step 3 Click ok and start the Telnet connection request. After successful connection, the interface displays "Please input hostname and password", as shown below.

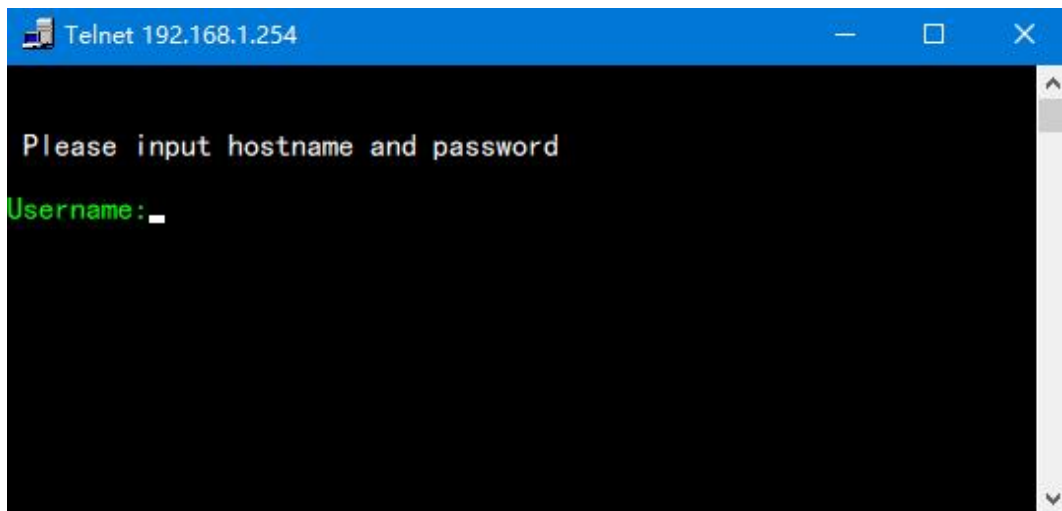

Step 4 Enter the correct username and password. After the username and password are verified, "Pass!" will be displayed. As the picture below:

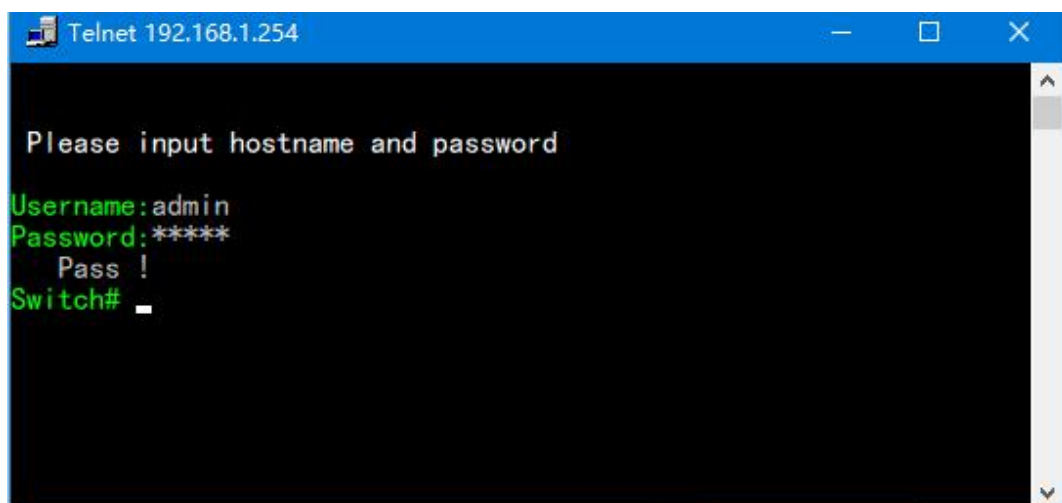

Note:

Refer to the contents of Chapter "Login to the WEB Interface" of "User Manual" for device's default username and password. The user name and password are admin by default.

Step 5 End.

1.3 Command Line Interface

The switch provides a command line interface and configuration commands to users for easy configuration and management. The command line interface has the following features:

- Local configuration through the Console port;
- Support history command save, 10 can be saved. Saved history command information can be selected through the upper and lower arrow key.
- User can enter "help" or "?" to get help;
- Command input supports Tab key intelligent completion;
- The command line interpreter adopts an incomplete search method for keywords, and the user only needs to type conflict-free keywords, for example, for the config command, just type conf.

1.3.1 Command Line Online Help

CLI provides the following kinds of online help:

- Complete help;
- Partial help.

Complete help

1) In any view, enter <?> to get all commands and their simple description in this view.

```
Switch# ?
List                --List commands of current menu
Help                --Help commands of current menu
Quit                --Quit from CLI
Exit                --Exit from current menu
Reboot              --Reboot switch
```

.....

2) Enter a command followed by "?" separated by space, all keywords and their simple description would be listed if this location has keywords.

```
Switch(information)# show ?
mac                 --Device MAC Address
version             --Device version
others              --Device type,name,etc
```

Partial help

1) Enter a character string followed by <?>, all character string that start with this character string will be listed.

```
Switch# M?
Mirror             <dir>  --Enter port mirror menu
```

```

Manage          <dir>    --Enter system manage menu
Multicast       <dir>    --Enter static multicast filters menu

```

2) Enter first several letters of the command and press <Tab>, if regard the first keyword of the entered letters as unique, then complete keyword would be displayed.

```

Switch# inf press <Tab>
Switch# information

```

1.3.2 Command Line Common Error

All commands typed by the user, if they pass the syntax check will be executed correctly; otherwise, error messages are reported to the user. Common error messages are shown in the table below.

English error message	Cause of Error
Invalid Command	No command found
	No keyword found
	Parameter type error
	Parameter value out of range
Incomplete Command	The input command is incomplete
Too many parameters	Too many parameters

1.3.3 History Command

command line interface provides features like Doskey, which can save history Command entered by user automatically. User can call history Commands saved by command line interface at any time and execute them repeatedly.

Access history command:

Operation	Key	Result
Visit last history command	The up cursor key<↑>	If there are earlier history commands, the last history command would be fetched
Visit next history command	The down cursor key<↓>	If there are later history commands, the next history command would be fetched

1.3.4 Common Command

The regular command is the most frequently used command. For the convenience of operation, the command List, Help, Quit, Exit and Reboot is arranged in all modes.

Common Command:

Operation	Command	Note
Lists the names of command in this mode	List	Execute in any mode
Lists the names of command and their help information in this mode	Help	Execute in any mode
From the current mode back to the login interface	Quit	Execute in any mode
From the current mode back to the last mode, can not back to login interface	Exit	Execute in any mode
Reboot the device	Reboot	Execute in any mode

Configuration Instance

1) Returns the previous layer from port configuration mode, enter the following bold font command and press enter key.

```
Switch(Port)# exit
Switch#
```

2) View the command format name in VLAN setting mode, enter the following bold font command and press enter key.

```
Switch(Vlan)# list
List
Help
Quit
Exit
Reboot
Show vlantype
Enable
Show_IsolateList
Delete_IsolateList
Config
PVLANSetting <dir>
QVLANSetting <dir>
```

3) restart the settings in the information view, enter the following bold font command and press enter.

```
Switch(information)# reboot
Please waiting.....
```

Please input hostname and password

Username:

2 Information Configuration Command

Enter device information view:

Operation	Command	Note
Enter device information view	information	Execute in the system view

```
Switch# information
Switch(information)#
```

2.1 Display Device Information

Display device information command.

Operation	Command	Note
Display system version	show version	Executable in the device information view
Display device MAC address	show mac	Executable in the device information view
Display model, name of the device	show others	Executable in the device information view

2.2 Configure Device Information

Configure device information, including type, name, number and description of the device, contact information, and so on.

Operation	Command	Note
-----------	---------	------

Operation	Command	Note
Configure device information	Config <options> <string>	<options>: <ul style="list-style-type: none"> • -t: device type • -n: device name • -p: device description • -c: contact information <string>: parameter



Notice

Input type should conform to GB2312 code type, otherwise display error will occur.

2.3 Clean up Device Information

Clean up device information, including type, name, number, description of the device and contact information.

Operation	Command	Note
Clean device information	Clean <options>	<options>: <ul style="list-style-type: none"> • -t: device type • -n: device name • -p: device description • -c: contact information

3 Port Configuration Command

Enter port configuration view.

Operation	Command	Note
Enter port configuration view	Port	Execute in the system view

```
Switch# Port
Switch(Port)#
```

3.1 Port Information Display

Port state and configuration information

Operation	Command	Note
Port state information display	Show state <portlist>	<portlist>: 1,2,3,.....or all
Port configuration information display	Show config <portlist>	<portlist>: 1,2,3,.....or all;

Configuration Instance

Display state information of port 1.

```
Switch(Port)# show state 1
      Speed  Port_status  Link_status  Interface_type
port 1 10M      HALF         LOS          TX
```

Display configuration information of port 1.

```
Switch(Port)# show config 1
      Speed  Mode  Port_status  Flow_contorl
Interface_type
port 1 Auto   HALF  Enable      Disable      TX
```

3.2 Port Enable

The user can enable or disable ports using the following commands. By default, the port is enabled.

Operation	Command	Note
Port enablement	switch <portlist> {enable disable}	<portlist>: 1,2,3,.....or all

Configuration Instance

Disable port 1.

```
Switch(Port)# switch 1 disable
[OK]
```

3.3 Port Flow Control

Enable or disable port flow control.

Operation	Command	Note
Enable port flow control	Flow-con <portlist> enable	<portlist>: 1,2,3,.....or all
Disable port flow control	Flow-con <portlist> disable	<portlist>: 1,2,3,.....or all

Configuration Instance

Enable port 2 flow control

```
Switch(Port)# flow-con 2 enable
[OK]
```

3.4 Port Speed and Working Mode

Configure the speed and duplex state of the port

Operation	Command	Note
-----------	---------	------

Operation	Command	Note
Configure the speed and duplex mode of the port	Mode <portlist> {10h 10f 100h 100f auto}	<portlist>: 1,2,3,.....or all Mode: <ul style="list-style-type: none"> • 10h: 10Mbps half duplex; • 10f: 10Mbps full duplex; • 100h: 100Mbps half duplex; • 100f: 100Mbps full duplex; • Auto: auto-negotiation

Configuration Instance

Configure the speed of Port 3 to 100Mbps and working mode to half duplex.

```
Switch(Port)# mode 3 100h
[OK]
```

3.5 Port MDI/MDIX Self-adaption

Configure straight-through line and cross line self-adaption.

Operation	Command	Note
Configure MDI/MDIX self-adaption	AutoMDI <portlist> <mode>	<portlist>: 1,2,3,.....or all <mode>: <ul style="list-style-type: none"> • 0: self-adaption • 1: MDI • 2: MDIX

3.6 Port Type Fiber Port/Copper Port

Configure port to fiber port or copper port.

Operation	Command	Note
Configure port transmission media type	FX_TX <portlist> {0 1}	<portlist>: 1,2,3,.....or all {0 1}: <ul style="list-style-type: none"> • 0: copper port (TX) • 1: fiber port (FX)

4 Bandwidth Configuration Command

Enter bandwidth management view

Operation	Command	Note
Enter bandwidth management view	Bandwidth	Execute in the system view

Switch# **bandwidth**

Switch(Bandwidth)#

4.1 Bandwidth Configuration

Ingress bandwidth and egress bandwidth configuration commands.

Operation	Command	Note
Limit package type	Config intype <portlist> {0 1 2 3}	<portlist>: 1,2,3,.....or all 0-1-2-3 <ul style="list-style-type: none"> • 0: all frames; • 1: broadcast, multicast and flood unicast data frames; • 2: broadcast and multicast packages only; • 3: broadcast package only

Operation	Command	Note
Configure ingress bandwidth	Config inrate <portlist> <low_bw> <normal_bw> <medium_bw> <high_bw>	<portlist>: 1,2,3,.....or all <low_bw> : low priority queue bandwidth (128k, 256k, 512k, 1M, 2M, 4M, 8M, 16M, 32M, 64M, 128M, 256M, 0 means unlimited); <Normal_bw>: bandwidth of normal priority queue,1-2 times of lower priority bandwidth; <medium_bw>: bandwidth of medium priority queue, 1-2 times of ordinary low priority bandwidth; <high_bw>: bandwidth of high priority queue, 1-2 times medium priority bandwidth
Configure egress bandwidth	Config egrate <portlist> <bandwidth>	<portlist>: 1,2,3,.....or all <bandwidth> : 128k, 256k, 512k, 1M, 2M, 4M, 8M, 0 means unlimited

Configuration Instance

Set the restrict packet types of port 1 to broadcast packets only, low priority to 128K, normal priority to 256K, medium priority to 512K, high priority to 1M.

```
Switch(Bandwidth) # config intype 1 3
[OK]
```

```
Switch(Bandwidth) # config inrate 1 128k 256k 512k 1m
[OK]
```

Configure the egress bandwidth of port 1 as unlimited.

```
Switch(Bandwidth) # config egrate 1 0
[OK]
```

4.2 Bandwidth Display

Display commands of ingress bandwidth and egress bandwidth.

Operation	Command	Note
View limit package type	Show intype <portlist>	<portlist>: 1,2,3,.....or all

Operation	Command	Note
View ingress bandwidth information	Show inrate <portlist>	<portlist>: 1,2,3,.....or all
View egress bandwidth information	Show egrate <portlist>	<portlist>: 1,2,3,.....or all

Configuration Instance

Display ingress bandwidth, egress bandwidth, and limited packet types of port 1.

```
Switch(Bandwidth)# show inrate 1
  port 1 egress bandwidth: unlimited
Switch(Bandwidth)# show egrate 1
  port 1 egress bandwidth: unlimited
Switch(Bandwidth)# show intype 1
  port 1 Limit packets: Broadcast only
```

5 IGMP Configuration Command

Enter IGMP snooping view

Operation	Command	Note
Enter the multicast filter configuration view	IGMP Snooping	Execute in the system view

```
Switch# igmp  
Switch(Igmp)# ?
```

5.1 IGMP Snooping Configuration Command

IGMP-snooping configuration

Operation	Command	Note
Configure IGMP snooping enable	Set IGMP {enable disable}	{enable disable}: <ul style="list-style-type: none">• Enable• Disable
Configure IGMP query enable	Set query {enable disable}	{enable disable}: <ul style="list-style-type: none">• Enable• Disable
Configure the IGMP query interval	Query <time>	<time>: 60-1000s
Display IGMP information	Show MAClist	Execute under the IGMP snooping view

Configuration Instance

Enable IGMP snooping and IGMP query, query interval set to 125s and display IGMP information.

```
Switch(MultiFilter)# set igmp enable  
[OK]
```

```
Switch(MultiFilter)# set query enable
[OK]
Switch(MultiFilter)# Query 125
[OK]
Switch(MultiFilter)# show MAClist
IGMP Snooping query time 125 seconds
[ 1] MAC List: 01-00-5E-00-00-FB Port: 1
```

6 Multicast Configuration Command

Enter the static multicast filter view.

Operation	Command	Note
Enter the static multicast view	Multicast	Execute in the system view

```
Switch# multicast
Switch(Multicast)#
```

6.1 Display Multicast Filter List

Display command of static multicast address.

Operation	Command	Note
Displays static multicast filter address	Show multicast	Execute in the multicast view

Configuration Instance

Displays information of the static address table.

```
Switch(Multicast)# show multicast
( 1) MAC : 01-22-33-44-55-66
      PORT: 1,2,3
```

6.2 Add static multicast address

Multicast address adding command

Operation	Command	Note
-----------	---------	------

Operation	Command	Note
Add multicast address	Add <macaddress> <portlist>	<macaddress>: multicast address in XY-XX-XX-XX-XX-XX or XY.XX.XX.XX.XX.XX, X is any hexadecimal number <portlist>: 1,2,3,.....or all

Configuration Instance

Add a multicast address of 01-22-33-44-55-66 with member ports of 1,2,3.

```
Switch(Multicast) # add 01.22.33.44.55.66 1-3
```

[OK]

6.3 Delete Static Multicast Address

Command of deleting multicast address

Operation	Command	Note
Delete multicast address	Delete <1-15>	<1-15> : entry 1-15 of multicast address

Configuration Instance

Delete entry 1 of static multicast address.

```
Switch(Multicast) # delete 1
```

[OK]

7 VLAN Configuration Command

Enter vlan configuration view:

Operation	Command	Note
Enter Vlan configuration view	Vlan	Execute in the system view

```
Switch# vlan
Switch(VLAN) #
```

7.1 VLAN Type Configuration and Display

VLAN type configuration and display commands.

Operation	Command	Note
Enter VLAN information view	Show vlantype	Execute in VLAN view
Select the VLAN type	Enable {0 1}	{0 1}: <ul style="list-style-type: none"> • 0: port-based VLAN • VLAN of 1: 802.1Q

Configuration Instance

Enable port VLAN and display the VLAN type.

```
Switch(VLAN) # enable 0
Based on port VLAN is enable!
[OK]
Tip: This configuration will be validated after restarting
Switch(VLAN) # show vlantype
Based on port VLAN is enable!
```

7.2 Port Isolation

Configure port isolation.

Operation	Command	Note
Configure isolated port	Config <isolatelist> <portlist>	<Isolatelist>: isolation group 1, 2, 3, 4, 5 <portlist>: port 1,2,3,.....or all
Delete isolated entry	Delete_IsolateList <isolatelist>	<Isolatelist>: isolation group 1, 2, 3, 4, 5
Display isolated entry	Show_IsolateList <isolatelist>	<Isolatelist>: isolation group 1, 2, 3, 4, 5

7.3 Port-based VLAN

Enter port VLAN view.

Operation	Command	Note
Port VLAN view	PVLANSetting	Execute in VLAN view

```
Switch(VLAN) # PVLANSetting
```

```
Switch(PVlan) #
```

Port VLAN configuration

Operation	Command	Note
Add Vlan	Add <item> <portlist>	<item> : VLAN ID range 1-4094 <portlist>: 1,2,3,.....or all
Delete VLAN	Delete <items>	<items>: 1, 4, 5-4094 or all
View Vlan information	Show vlan <items>	<items>: 1, 4, 5-4094 or all

Configuration Instance

Add VLAN 2 with port members of port 2 and port 3.

```
Switch(PVlan) # add 2 2,3
```

```
[OK]
```

7.4 IEEE802.1Q VLAN

Enter 802.1Q VLAN view

Operation	Command	Note
802.1Q Vlan view	QVLANSetting	Execute in VLAN view

```
Switch(Vlan)# qVLANSetting
```

```
Switch(QVlan)#
```

802.1Q VLAN Configuration

Operation	Command	Note
Set port type	Config type <portlist> {Trunk Access}	<portlist>: 1,2,3,.....or all {Trunk Access}: <ul style="list-style-type: none"> Trunk: keep VID unchanged Access: replace VID with port default VID
Pvid setting	config pvid <portlist> <pvid>	<portlist> : 1, 2, 3... or all, 0 represents the CPU port <pvid>: 1-4094
Add Vlan	Add <vid> <portlist> <typelist>	<vid>: 1-4094 <portlist> : 1, 2, 3... or all, 0 represents the CPU port <typelist>: <ul style="list-style-type: none"> M: UnModified U: UnTagged
Delete VLAN	Delete <vidlist>	<vidlist>: 1-4094 or all
View vlan information	Show vlan <vidlist>	<vidlist>: 1-4094 or all
View port pvid	Show pvid <portlist>	<portlist> : 1, 2, 3... or all, 0 represents the CPU port
View port type	Show type <portlist>	<portlist> : 1, 2, 3... or all, 0 represents the CPU port

Configuration Instance

Add VLAN 3, port 2-3, member type UnModified.

```
Switch(QVlan)# add 3 2-3 M  
VID      : 3
```

```
Port_cpu   : ----  
port 1     : ----  
port 2     : UnModified  
port 3     : UnModified  
...  
[OK]
```

8 QoS Configuration Command

Enter QoS configuration view.

Operation	Command	Note
Enter QoS configuration view	QoS	Execute in the system view

```
Switch# QoS
```

```
Switch(QoS)#
```

8.1 QoS Queue Mechanism Configuration

QoS queue mechanism configuration command.

Operation	Command	Note
QoS queue mechanism configuration	Queuingm {0 1}	{0 1}: <ul style="list-style-type: none"> • 0: weighted average scheduling algorithm • 1: strict priority scheduling algorithm

Configuration Instance

QoS queue mechanism was set as weighted average scheduling algorithm (8:4:2:1).

```
Switch(QoS)# queuingm 0
```

```
[OK]
```

8.2 ToS and CoS Enablement

ToS and CoS enable configuration command.

Operation	Command	Note
-----------	---------	------

Operation	Command	Note
ToS and CoS enablement	Check <portlist> {0 1 2 3}	<portlist>: 1,2,3,.....or all 0-1-2-3 <ul style="list-style-type: none"> • 0: Forbid • 1: use ToS • 2: use Cos • 3: all use

Configuration Instance

1) Enable the Cos of port 1, 3, 4 and 6.

```
Switch(QoS) # Check 1,3,4,6 1
[OK]
```

2) Enable ToS of port 2, 3, 5 and 6.

```
Switch(QoS) # Check 2,3,5,6 2
[OK]
```

8.3 ToS/CoS Value Mapping

The user can configure the ToS/CoS value mapping using the following command.

Operation	Command	Note
CoS value mapping configuration	Config cos <coslist> <classlist>	<coslist> : CoS mapping value, 0, 1, 2-7 <classlist>: <ul style="list-style-type: none"> • L: low • N: normal • M: medium • H: high
ToS value mapping configuration	Config tos <dscplist> <classlist>	<dscplist> : ToS mapping value, 1, 2, 3-64 <classlist>: <ul style="list-style-type: none"> • L: low • N: normal • M: medium • H: high

Configuration Instance

1) set 0, 2, 5, and 7 of CoS value to correspond to the priority queues of Low, Normal, Medium, and High respectively.

```
Switch(QoS) # config cos 0,2,5,7 1,n,m,h
```

```

CoS value:0   priority:Low
CoS value:2   priority:Normal
CoS value:5   priority:Medium
CoS value:7   priority:High

```

2) set 1,17,42 and 62 of Dscp values to correspond to the priority queues of Low, Medium, High and Normal.

```

Switch(QoS)# config dscp 1,17,42,62 1,m,h,n
DSCP ( 1) :Low      DSCP (17) :Medium   DSCP (42) :High
DSCP (62) :Normal

```

8.4 Default Port Priority Configuration

The user can configure the default port priority using the following command.

Operation	Command	Note
Default port priority configuration	Default priority <portlist> <classlist>	<portlist>: 1,2,3,.....or all <classlist>: port priority <ul style="list-style-type: none"> • L: low • N: normal • M: medium • H: high

Configuration Instance

Set the default priority of port 1 to normal.

```

Switch(QoS)# default priority 1 n
[OK]

```

8.5 Display QoS configuration information

The user can view the QoS information using the following command.

Operation	Command	Note
View the QoS queue mechanism	Show queuingm	Execute in QoS view
View CoS value mapping	Show cos <coslist>	<coslist> : cos mapping value, 0, 1, 2-7
View ToS value mapping	Show tos <dscplist>	<dscplist> : tos mapping value, 1, 2, 3-64
View ToS/CoS enablement state	Show state <portlist>	<portlist>: 1,2,3,.....or all

Operation	Command	Note
View the default port priority	Show default <portlist>	<portlist>: 1,2,3,.....or all

9 Ring Configuration Command

Enter ring configuration view.

Operation	Command	Note
Enter ring configuration view	ring	Execute in the system view

```
Switch# ring
Switch(Ring)#
```

9.1 Enable or Disable Ring Network Function

Users can set up ring network enablement using the following command.

Operation	Command	Note
Ring network enable	Open {3 4}	{3 4}: <ul style="list-style-type: none"> • 3: enable ring3; • 4: enable rstp
Ring network close	Close {0 3 4}	{0 3 4}: 0: disable ring network function; 3: disable Ring3; 4: disable rstp

Configuration Instance

Enable ring3

```
Switch(Ring)# Open 3
[OK]
```

Tip: This configuration will be validated after restarting

9.2 Ring3 Configuration

Once Ring3 is enabled, Ring3 can be set using the following command.

Operation	Command	Note
Configure ring3	Config ring3 {1 2} <id> <LoopType> <Ringport> <hellotime> <Master>	{1 2} : 1 represents ring group 1, 2 represents ring group 2 <id> : represents the ring network identity, and the value is 0-255 <LoopType>: Loop type <ul style="list-style-type: none"> • 0: Single • 1: Couple • 2: chain • 3: Daul_homing <portlist>: 2 ring network ports, such as: 1, 2 <hellotime>: value range is [0-300]*100ms <Master>: single-ring master-slave station <ul style="list-style-type: none"> • 0: Master • 1: Slave
Modify ring3	Modify ring3 {1 2} <options> <parameter>	{1 2} : 1 represents ring group 1, 2 represents ring group 2 <options>: the options that can be modified are as follows: <ul style="list-style-type: none"> • -h: Hello packet interval time,with the value of [0-300]*100ms. • -i: ring network ID, ranging [0-255] • -t: ring network type, ranging {0 1 2 3} • -p: ring network port • -s: ring network status, {enable or disable} • -m: ring network master-slave station, with the value of {0:Master 1:Slave} <parameter> : parameters matched with -h -i -p

Configuration Instance

Configure Port 1 and Port 2 to the first group loop port, loop id is 1, hello time is 0 and loop type is Couple.

```
Switch(Ring)#Open 3 //enable Ring3
[OK]
```

Tip: This configuration will be validated after restarting
 Switch(Ring)#config ring3 1 1 1 1,2 0 1// configure port 1, 2 to
 Ring3, Ring type to Couple, no master station

[OK]

Tip: This configuration will be validated after restarting

9.3 Display Ring Network Configuration Information

After configuring ring network, user can use the following command to view ring network configuration information.

Operation	Command	Note
Display Ring network configuration information	show ring	Execute in Ring network view
Display ring network status	show ring_state	Execute in Ring network view

Configuration Instance

View the current Ring network configuration information

```
Switch(Ring)# show ring
Ring III Enable
  Group:1 ID: 1 port:6,5 type:      Couple Hello_time: 0*100ms
Mster:Slave      state:Enable
  Group:2 ID: 2 port:3,4 type:      Single Hello_time: 0*100ms
Mster:Slave      state:Disable
```

9.4 RSTP Configuration

Once RSTP is enabled, RSTP can be set using the following command.

Operation	Command	Note
-----------	---------	------

Operation	Command	Note
Configure RSTP status	Config rstp_state <priority> <hellotime> <delaytime> <maxage>	<priority>: RSTP priority {0 4096 8192 12288 16384 20480 24576 28672 32768 36864 40960 45056 49152 53248 57344 61440} <hellotime> : polling interval time, ranging 1-10s <delaytime> : forwarding delay time, ranging from 4 to 30s <maxage> : address survival time, ranging 6-40s
Modify RSTP state parameter	Modify rstp_state <options> <parameter>	<options>: <ul style="list-style-type: none"> • -P: priority {0 4096 8192 12288 16384 20480 24576 28672 32768 36864 40960 45056 49152 53248 57344 61440} • -h: polling interval time, ranging from 1 to 10s • -d: forwarding delay time, ranging from 4 to 30s • -m: address survival time, ranging 6-40s <parameter>
Configure RSTP port	Config rstp_port <port> <pathcost> <portpriority> <p2p> <edge> <enable>	<port>: RSTP port <pathcost> : port path cost, ranging 0-200000000 <portpriority> : port priority, the range is {0 16 32 48 64 80 96 112 128 144 160 176 192 208 224 240} <p2p> : point-to-point network connection, values are {no yes auto} <edge>: directly connected terminal, values are {no yes} <enable> : participate in spanning tree, values are {no yes}

Operation	Command	Note
Modify the RSTP port parameters	Modify rstp_port <port> <options> <parameter>	<port>: RSTP port <options>: <ul style="list-style-type: none"> • -c: port path cost, ranging 0-200000000 • -p: port priority, ranging {0 16 32 48 64 80 96 112 128 144 160 176 192 208 224 240} • -t: point-to-point network connection, values are {no yes auto} • -e: direct connection terminal, values are {no yes} • -a: participate in spanning tree, values are {no yes} <parameter>

Configuration Instance

1) Configure the path cost of RSTP port 1 to 2000.

```
Switch(Ring)# modify rstp_port 1 -c 2000
[OK]
```

Tip: This configuration will be validated after restarting

2) Configure priority of switch of rstp to 4096

```
Switch(Ring)# modify rstp_state -p 4096
[OK]
```

Tip: This configuration will be validated after restarting

9.5 Display RSTP Current Status

After configuring RSTP, user can use the following command to view the current status of RSTP.

Operation	Command	Note
Display RSTP current status	RSTP Status	Execute in Ring network view

10 LLDP Configuration Command

Enter LLDP View

Operation	Command	Note
Enter LLDP configuration view	LLDP	Execute in the system view

```
Switch# lldp
Switch(Lldp)#
```

10.1 LLDP enablement

Enable/disable LLDP configuration command

Operation	Command	Note
Enable/disable LLDP	Lldp {enable disable}	{enable disable}: <ul style="list-style-type: none"> • Enable • Disable

10.2 Display LLDP Information

Display LLDP information

Operation	Command	Note
Display LLDP configuration	Show	Execute in LLDP configuration view

10.3 LLDP Configuration

LLDP configuration command

Operation	Command	Note
Send LLDP configuration	Config <TxInterval>	<TxInterval>: Tx Interval [5-32768]
Port configuration	Set <portlist> {0 1 2 3}	<portlist>: 1,2,3,.....or all 0-1-2-3 <ul style="list-style-type: none"> • 0: Disabled • 1: Rx Tx • 2: Tx only • 3: Rx only
Display neighbor information	Print neighbors	Execute in LLDP configuration view
Display local LLDP statistics	print local	Execute in LLDP configuration view
Clear local LLDP statistics	clear	Execute in LLDP configuration view

11 SNMP Configuration Command

Enter SNMP configuration view.

Operation	Command	Note
Enter SNMP configuration view	SNMP	Execute in the system view

```
Switch# snmp
Switch(Snmp)# ?
```

11.1 SNMP Enable

SNMP enable and disable configuration command.

Operation	Command	Note
Enable/Disable SNMP	snmp {enable disable}	{enable disable}: <ul style="list-style-type: none"> • Enable: enable SNMP • Disable: disable SNMP

Configuration Instance

Enable SNMP function

```
Switch(Snmp)# snmp enable
[OK]
```

11.2 SNMP Configuration

Community name and gateway address configuration commands.

Operation		Command	Note
Configure Read/Write community	SNMP	Config <orcomm> <rwcomm>	<orcomm>: read-only community name <rwcomm>: read-write community name
Configure gateway.	SNMP	Trap {1 2 3} <ip>	{1 2 3}: IP address 1-3 <IP>: the IP address of the trip destination, such as 192.168.1.1

Configuration Instance

Set SNMP gateway address 2 to 192.168.11.1.

```
Switch(Snmp) # trap 2 192.168.11.1
[OK]
```

11.3 SNMP Display

SNMP display command.

Operation		Command	Note
Display Information	SNMP	SHOW	Execute in SNMP view

Configuration Instance

Display SNMP configuration information.

```
Switch(Snmp) # show
The only read community name      :public

The read or write community name:private

The SNMP gateway                   :192.168.1.1

The SNMP gateway                   :192.168.11.1
```

12 Serial Configuration Command

The serial port server configuration includes

- Port number configuration
- Serial Parameter Settings
- Work Mode Settings

12.1 Serial Port Introduction

The serial port supports TCP Client, TCP Server, UDP, TcpAuto, as well as TCP Server and UDP segment advanced working mode

Enter serial port configuration view command:

Operation	Command	Note
Enter serial port configuration view	Serial	Execute in the system view
Enter serial port configuration	Com1、Com2	Execute in the serial port view



Note

The number of serial ports entering the serial port configuration shall be subject to the number of serial ports possessed by the actual product.

12.2 Serial Port Information

Serial Port Information:

Operation	Command	Note
Display connection status of the serial port	Show link <i><port></i>	<i><port></i> : 1,2,3 or all

Operation	Command	Note
Statistics serial port information status	Show err <port>	<port>: 1,2,3 or all
Clean up serial port information	clear err <port>	<port>: 1,2,3 or all
Displays serial port configuration information	Show config <port>	<port>: 1,2,3 or all

Configuration Instance

- Display the connection status of serial port 1
Serial (com1) # **show link 1**
- Statistics error message of serial port 1
Serial (com1) # **show err 1**
- Clean up the error message of serial port 1
Serial (com1) # **clear err 1**
- Display configuration information of serial port 1
Serial (com1) # **show config 1**

12.3 Serial Port Parameter

Configure the serial port parameter:

Operation	Command	Note
Configure the serial port parameter	Config <Baudrate><parity> <Databits><stopbits>	<Baudrate port>: baud rate 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 <parity>: Parity <ul style="list-style-type: none"> • 0: None • 1: Odd • 2: Even <Databits>: Databits <ul style="list-style-type: none"> • 3: 8bits <stopbits>: Stop Bits <ul style="list-style-type: none"> • 0: 1bit • 1: 2bits
Serial port data frame message	Set packs_bytes <bytes >	<bytes> : data frame range 0~1430 bytes
Serial character spacing	Set packs_time <time >	< time > : character interval of 1~500ms

Operation	Command	Note
COM Mode	Set Com_mode <Com_mode>	< Com_mode >: <ul style="list-style-type: none"> • 0: RS232 • 1: RS485 • 2: RS422

Configuration Instance

- Configure the parameter of serial port 1
Serial (com1) # **config 115200 1 2 1**
- Configure the data frame for serial port 1
Serial (com1) # **set packs_bytes 500**
- Configure character spacing for serial port 1
Serial (com1) # **set packs_time 50**
- Configure serial port 1 to RS422 work mode
Serial (com1) # **set_com_mode 2**

12.4 COM Work Mode Configuration

COM work mode configuration information:

Operation	Command	Note
COM work mode configuration information	Set oneToMulti <oneToMulti>	<oneToMultioneToMulti>: <ul style="list-style-type: none"> • 0: basic mode • 1: advanced mode

Configuration Instance

- Configure serial port 1 to advanced mode
Serial (com1) # **set oneTomulti 1**

12.5 TCP Client working mode configuration

Configuration information of serial port TCP Client mode:

Operation	Command	Note
-----------	---------	------

Operation	Command	Note
Serial TCP Client mode configuration information	Set TCP_C <session_list> <enable> <local_port> <dns> <dest_addr> <dest_port> <link_mode> <heartbeat> <TCP_timeout> <realCom>	<session_list>: sessions 1~4 <disable>: disable 0 <eable>: eable 1 Local port Domain name <ul style="list-style-type: none"> • 1: Enable • 0: disable Destination address Destination port <link_mode> : <ul style="list-style-type: none"> • 1: connect immediately • 0: data trigger Heartbeat time Disconnected time out <realCom>: <ul style="list-style-type: none"> • 1: Enabled • 0: disable

Configuration Instance

Configure TCP Client working mode of the serial port 1

```
Serial (com1) # set TCP_C 4 1 30000 1 192.168.1.254 31000 1 0 300
1
```

12.6 UDP Working Mode Configuration

UDP mode configuration information of serial port:

Operation	Command	Note
TCP UDP mode configuration information of serial port	Set UDP <session_list> <enable> <local_port><dns> <dest_addr> <dest_port> <realCom>	<session_list>: sessions 1~4 <disable>: disable 0 <eable>: eable 1 Local port Domain name Destination address Destination port <realCom>: <ul style="list-style-type: none"> • 1: Enabled • 0: disable

Configuration Instance

Configure UDP working mode of serial port 1

```
Serial (com1) # set UDP 4 1 30000 1 192.168.1.254 31000 31000 1
```

12.7 TCP Server working mode configuration

Serial TCP Server mode configuration information:

Operation	Command	Note
Serial TCP Server mode configuration information	Set TCP_S <session_list> <enable> <local_port> <heartbeat> <TCP_timeout> <realCom>	<session_list>: sessions 1~4 <enable>: enable 1, disable 0 Local port Heartbeat time Disconnected time out <realCom>: <ul style="list-style-type: none"> • 1: Enabled • 0: disable

Configuration Instance

Configure the serial port 1 TCP Server working mode

```
Serial (com1) # set TCP_S 4 1 30000 10 300 1
```

12.8 TCP Auto Working Mode Configuration

Configuration information of serial port TCP Auto mode:

Operation	Command	Note
-----------	---------	------

Operation	Command	Note
Serial port TCP Auto mode configuration information	Set TCP_A <session_list> <enable> <local_port> <dns> <dest_addr> <dest_port> <link_mode> <heartbeat> <TCP_timeout> <realCom>	<session_list>: sessions 1~4 <enable>: enable 1, disable 0 Local port Domain name Destination address Destination port <link_mode>: <ul style="list-style-type: none"> • 1: connect immediately • 0: data trigger Heartbeat time Disconnected time out <realCom>: <ul style="list-style-type: none"> • 1: Enabled • 0: disable

Configuration Instance

Configure serial port 1 TCP Auto working mode

```
Serial (com1) # set TCP_A 4 1 30000 1 192.168.1.254 31000 1 10 300
1
```

12.9 Serial Port Advanced Mode

COM work mode configuration information:

Operation	Command	Note
Serial port advanced mode information	Set Session_multi <net_mode > <session_number>	<net_mode >: <ul style="list-style-type: none"> • 1: TCP server • 2: UDP <session_number>: sessions 0~4

Configuration Instance

Configure advanced mode of serial port 1

```
Serial (com1) # set session_multi 1 4
```

12.10 TCP Server Advanced Mode Configuration

Advanced mode configuration information of serial TCP Server:

Operation	Command	Note
Serial TCP Server advanced mode configuration information	Set TCP_S_multi <local_port> <heartbeat> <TCP_timeout> <realCom>	Local port Heartbeat time Disconnected time out <realCom>: <ul style="list-style-type: none"> • 1: Enabled • 0: disable

Configuration Instance

Configure the serial port 1 TCP Server advanced mode.

```
Serial (com1) # set TCP_S_multi 30000 10 300
```

12.11 UDP Advanced Mode Configuration

UDP advanced mode configuration information of serial port:

Operation	Command	Note
UDP advanced mode configuration information of serial port	Set UDP_multi <session_list> <local_port> <dns> <dest_addr> <dest_addr_end> <dest_port> <realCom>	<session_list>: sessions 0~4 Local port Domain name <dest_addr> : the starting destination address for the segment address <dest_addr_end> : end destination address of segment address Destination address <realCom>: <ul style="list-style-type: none"> • 1: Enabled • 0: disable

Configuration Instance

Configure serial port 1 UDP advanced mode.

```
Serial (com1) # set UDP_multi 4 30000 1 192.168.0.1 192.168.0.254 31000 1
```

13 Alarm Configuration Command

Enter alarm configuration view.

Operation	Command	Note
Enter alarm configuration view	Alarm	Execute in the system view

Switch# **alarm**

Switch(Alarm)#

13.1 Alarm Configuration/Delete

The user can configure the alarm using the following commands

Operation	Command	Note
Relay alarm	Type {0 1}	{0 1}: <ul style="list-style-type: none"> • 0: Disable • 1: Enable
Configure the power supply alarm.	Power relay <powerID> {enable disable}	<powerID>: <ul style="list-style-type: none"> • 1: represents the first power supply; • 2: represents the second power supply; • All: all the power supplies {enable disable}: <ul style="list-style-type: none"> • Enable; • Disable
Configure the port alarm.	Port relay <portlist> {enable disable}	<portlist>: 1,2,3,.....or all {enable disable}: <ul style="list-style-type: none"> • Enable; • Disable

Operation	Command	Note
close the alarm information	Close alarm	Execute in alarm view

Configuration Instance

1) enable the alarm of port 1, 3, 5 and 7.

```
Switch(Alarm)# port relay 1,3,5,7 enable
[OK]
```

2) disable the alarm function.

```
Switch (Alarm) # close alarm
[OK]
```

13.2 Display alarm information

The user can view the alarm information using the following command.

Operation	Command	Note
Display relay alarm information	Show type	Execute in alarm view
Display power supply alarm information	Show power <powerID>	<powerID>: 1: represents the first power supply; 2: represents the second power supply; All: represents all the power supply
Displays alarm information of the port	Show port <portlist>	<portlist>: 1,2,3,.....or all

Configuration Instance

View alarm information of the port

```
Switch(Alarm)# show type
Relay type: open
```

14 Statistics Configuration Command

Enter port statistics configuration view.

Operation	Command	Note
Enter port statistics view	Statistics	Execute in the system view

```
Switch# statistics
Switch(Statistics)#
```

14.1 Port Statistics Configuration View

Port statistics configuration.

Operation	Command	Note
Count the frame number and type of ports	Show frames <port>	<portlist>: 1,2,3,.....or all
Clean up the frame count	Clean frames	Execute in port statistics view

Configuration Instance

Count the frame number and types of port 1.

```
Switch(Statistics)# show frames 1
  InGoodOctets    96376          OutOctets        238454
  InBadOctets     0                OutUnicast       337
  InUnicasts      225             OutBroadCasts    3
  InBroadcasts    354             OutMulticasts    101
  InMulticasts    340             OutPause         0
  InPause         0                Excessive        0
  InUndersize     0                Collisions       0
  InFragments     0                Deferred         0
```

InOversize	0	Single	0
InJabber	0	Multiple	0
IN RxErr	0	OutFCSErr	0
INFCSErr	0	Late	0

15 Mirror Configuration View

Enter port mirroring configuration view.

Operation	Command	Note
Enter port mirroring configuration view	Mirror	Execute in the system view

```
Switch# mirror
Switch(Mirror)#
```

15.1 Port Mirroring Configuration/Delete

The user can configure/delete the port mirroring using the following command.

Operation	Command	Note
Configure port mirroring	Config {1 2 3} <mirror_port> <port>	{1 2 3}: <ul style="list-style-type: none"> • 1: means collecting all data • 2: means collecting ingress data • 3: means collecting data of egress <mirror_port > : mirror port 1, 2, 3... Or all <portlist>: collect port 1,2,3,.....or all
Delete mirror information	Close mirror	Execute in port mirroring view

Configuration Instance

Configure port 3 to collect all data from ports 1 and 2.

```
Switch(Mirror)#config 0 1,2 3
[OK]
```

15.2 Displays port mirroring information

View mirror information command:

Operation	Command	Note
Display mirror information	Show mirror	Execute in port mirroring view

Configuration Instance

View port mirroring information.

```
Switch(Mirror) #show mirror
```

```
Mirror portlist: 1,2
```

```
Collect port    : 3
```

16 EventLog Configuration Command

Enter log information view.

Operation	Command	Note
Enter log information view	Eventlog	Execute in the system view

```
Switch# eventLog
Switch(EventLog) #
```

16.1 Log Information Enable

Log information enable configuration.

Operation	Command	Note
Log information enable configuration	EventLog {Enable Disable}	Execute in log information view.

Configuration Instance

Enable logging.

```
Switch(EventLog) # eventLog enable
[OK]
```

16.2 Log Information Type

Log information type configuration.

Operation	Command	Note
Log information type configuration	LogType {0 1 2 3}	0-1-2-3 <ul style="list-style-type: none"> • 0: all messages • 1. Startup information • 2: operation information • 3: link information
Delete log record	ClearEventLog	Execute in log information view.

Configuration Instance

Log device connection information.

```
Switch(EventLog) # logType 3
[OK]
```

16.3 Log Information Status Display

Log information status display.

Operation	Command	Note
Log information status	Show EventLog	Execute in log information view.

Configuration Instance

Display the logging information status.

```
Switch(EventLog) # show EventLog
Log Record      : Enable
Display Type    : Connection
```

17 Time Configuration Command

Enter time configuration view.

Operation	Command	Note
Enter time configuration view	Time	Execute in the system view

```
Switch# time
Switch(Time)#
```

17.1 Time Configuration

Time Configuration Command

Operation	Command	Note
Enable time configuration	enable	Execute in time configuration view
Disable time configuration	close	Execute in time configuration view
SNTP synchronization period	Interval <Time>	<Time>: time interval, unit: seconds.
World time zone selection	Zone <time-zone>	<time-zone>: World Time Zone,{-12 -11 -10 -9 -8 -7,1 -7,2 -6,1 -6,2 -5,1 -5,2 -4,1 -4,2 -3,1 -3,2 -2 -1 +0,1 +0,2 +1,1 +1,2 +2,1 +2,2 +3 +4 +5 +6 +7 +8,1 +8,2 +9 +10,1 +10,2 +11 +12,1 +12,2}
NTP server address	Server <serveraddr>	<serveraddr>: NTP server address

Configuration Instance

Set the corresponding mapping value of the world time zone to + 8,1.

```
Switch(Time)# zone +8, 1
[OK]
```

17.2 Displays the Time Configuration View

Displays the time configuration information.

Operation	Command	Note
Displays the time configuration information	Show	Execute in the time view

Configuration Instance

Displays time configuration information.

```
Switch(Time)# show
  Time Configuration:Enable
  The World TimeZone:(GMT+08:00) China, Hong Kong, Australia
Western
  The NTP server:time-a.nist.gov
  The SNTP Synchronization interval:10 (s)
  The system time:2020-12-29,01:08:47, Tue
```

18 Manage Configuration Command

Enter system management view

Operation	Command	Note
Enter system management view	Manage	Execute in the system view

```
Switch# manage
Switch(Manage) #
```

18.1 Display Device Network Address

View IP, subnet mask, default gateway of the device.

Operation	Command	Note
Display IP, subnet mask, default gateway of the device.	show net_address	Execute in system management view

Configuration Instance

View IP, subnet mask, default gateway of the device.

```
Switch(Manage) # show net_address
Device gateway      : 192.168.1.1
Device mask address : 255.255.255.0
Device IP address   : 192.168.1.254
Device DNS address  : 202.96.134.133
```

18.2 Network Diagnosis Setting

Enter system management view:

Operation	Command	Note
Network diagnosis setting	Ping <IP_address> <options> <content> <options> <content> <options>	<IP_address> : IP address, for example 192.168.1.254 <options>: <ul style="list-style-type: none"> -t: Time To Live -l: Data size -n: Number of echo requests to send <content> : the parameter that matches -t/-l/-n

Configuration Instance

The Ping address of the device is 192.168.5.117, and the packet size is 64, 2 messages will be sent.

```
Switch(Manage)# ping 192.168.5.117 -l 64 -n 2
Pinging 192.168.5.117 with 64 bytes of data:
Reply from 192.168.5.117: bytes=64 time<0ms TTL=64
Reply from 192.168.5.117: bytes=64 time<0ms TTL=64
Ping statistics for 192.168.5.117:
    Packets: Sent = 2, Received = 2, Lost = 0 (0.000000% loss).
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

18.3 System Log Information

The user can set the device IP, the default gateway address with the following command.

Operation	Command	Note
Configure the server address information of the syslog	Syslog <ip_address> <port_num>	<ip_address>: syslog server IP address <port_num>: TCP port of syslog server

18.4 IP Address, Default Gateway Settings

The user can set the device IP, the default gateway address with the following command.

Operation	Command	Note
-----------	---------	------

Operation	Command	Note
Device IP address configuration	IP <IP_address> <mask>	<IP_address>: IP address <mask>: subnet mask
Default gateway configuration	Gateway <gateway>	<gateway>: gateway address
DNS Server Address	DNS <Server>	<Server> : DNS server address, such as 202.96.134.133.
DHCP Automatic Acquisition of IP	DHCP {enable disable}	{enable disable}: <ul style="list-style-type: none"> • Enable • Disable: disable

Configuration Instance

Configure the IP address of the device to 192.168.5.25, the subnet mask to 255.255.255.0 and the default gateway to 192.168.5.1

```
Switch(Manage) # IP 192.168.5.25 255.255.255.0
[OK]
The Switch is rebooting.Please waiting.....
Switch(Manage) # gateway 192.168.5.1
[OK]
The Switch is rebooting.Please waiting.....
DHCP
```

18.5 System Timeout Settings

The user can set the system timeout with the following command.

Operation	Command	Note
System timeout settings	Set <time_out>	<time_out> : system timeout, value range is [0-60], 0 means to disable timeout function

Configuration Instance

Set the system timeout to 10 minutes.

```
SWitch (manage) # set 10
[OK]
```



Note

The system timeout is used to define the timeout period without any operation after entering CLI configuration mode. After the system timeout, it will automatically back to user mode

and re-authenticate the user name and password.

18.6 User Name and Password Settings

The user can set the user name and password with the following command.

Operation	Command	Note
User name configuration	Hostname <hostname>	<hostname>: username string
Password configuration	Password <password> <password>	<password> : password string

18.7 Restore Factory Settings

The user can restore the device to factory settings with the following command.

Operation	Command	Note
Restore the device to factory settings.	Restore	Execute in system management view

Configuration Instance

Restore the device to factory settings.

```
Switch (manage) # restore
```

```
Restore Settings or not? (yes/no) yes //press <Y>
```

```
Wait.....
```

19 TFTP Configuration Command

Enter TFTP Configuration View.

Operation	Command	Note
Enter TFTP configuration view	TFTP	Execute in the system view

```
Switch# TFTP
Switch(TFTP)#
```

19.1 TFTP Configuration

TFTP configuration command

Operation	Command	Note
The address of TFTP server	Server <ip_address>	<ip_address> : TFTP server IP address, for example 192.168.1.254
Upload configuration file or update program	Get <File_name>	<File_name> : program name, such as XXXX. cfg.
Download Configuration File	Put <File_name>	<File_name> : program name, such as XXXX. cfg.

19.2 Display TFTP Configuration Information

Display TFTP configuration information.

Operation	Command	Note
-----------	---------	------

Operation	Command	Note
Display TFTP configuration information	Show TFTP_config	Execute in the TFTP view

Configuration Instance

Display TFTP configuration information.

```
Switch(TFTP)# show tFTP_config  
TFTP Server ip: 192.168.1.1
```