

R10L100-67T2ST

10.4" IP67 Stainless Resistive Chassis Display



KEY FEATURES

- 10.4", 1024 x 768
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP67 waterproof and dustproof



SPECIFICATIONS


Display			
Resolution	1024x768	Size	10.4 inches
Contrast Ratio	1000:1	Panel Brightness	350 nits
Display Color	16.2M Colors	View Angles	88,88,88,88
Active Area	210.4x157.8 mm	Touch / Glass	Resistive Touch Screen Bonding With Panel Protection Glass Without touch function (Optional)
Mechanical			
Dimension	311 x 257 x 47.4 mm	Mounting	VESA Mount Yoke Mount
Enclosure	Stainless Housing	Cooling System	Fanless design
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 45°C
Storage Temperature	-20°C to 60°C	IP rating	IP67
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x M12 waterproof connector for 12V DC	USB Port	1x M12 waterproof connector for touch screen control (Optional)
Serial Port	1 x M12 waterproof connector for touch screen control (Optional)	Video	1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional)
Indicator	1 x LED Indicator for power 1 x LED Indicator for status		
Control			
Button	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button		
Accessory			
Accessory	100~240V AC to DC Adapter with waterproof connector	Optional Accessory	Yoke mount stand (Optional) External HDMI cable with waterproof connector

Power Cord
 External VGA cable with waterproof connector
 External USB or RS232 cable with waterproof connector for touchscreen control
 Waterproof caps
 Manual
 VESA screws

(Optional)
 External DVI cable with waterproof connector
 (Optional)

Power	
Power Rating	12V DC (M12 type)

DIMENSIONS UNIT:MM

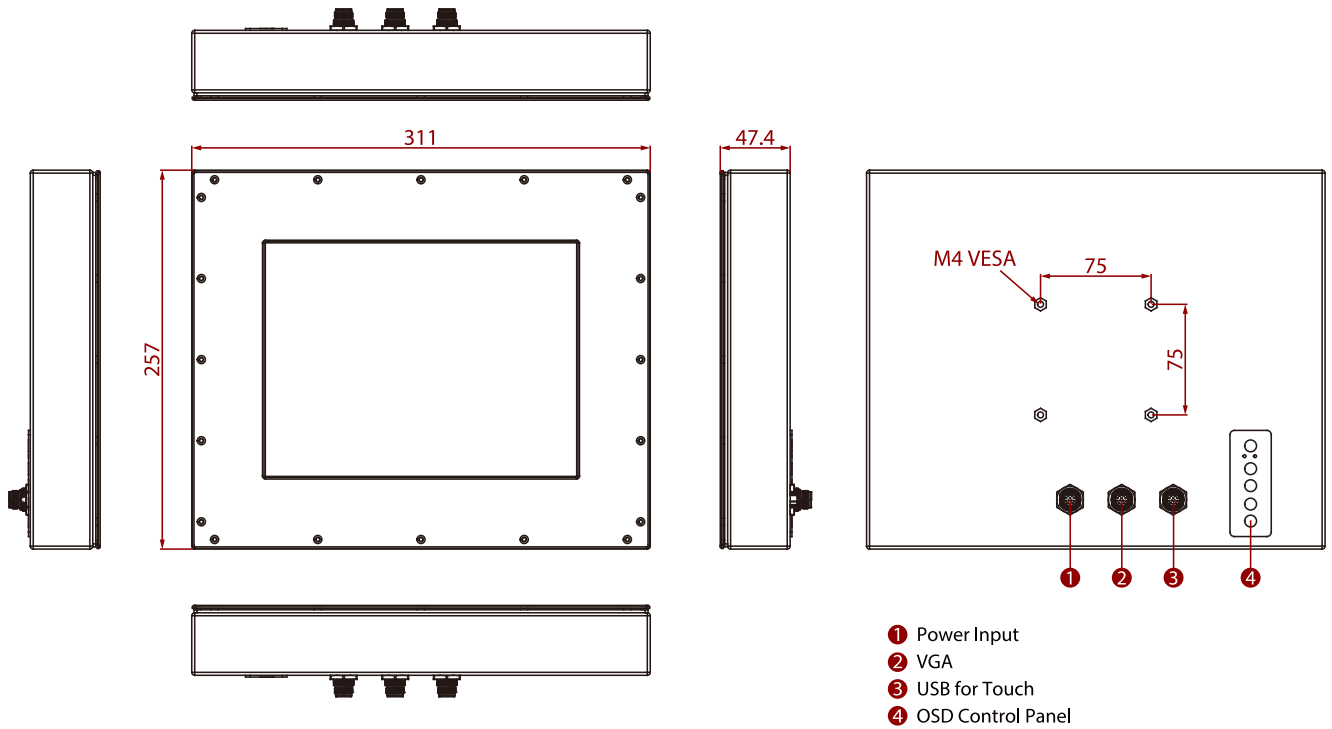

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.